





## Contents

<b>Introduction</b>	<b>689</b>
<b>PFD's / Lifejackets</b>	
PFD's / Lifejackets . . . . .	.690 - 692
Inflatable PFD's. . . . .	.693 - 696
Inflatable PFD Spares / Harnesses . . . . .	.697 - 698
<b>Lifebuoy Rings &amp; Accessories</b>	
Lifebuoy Rings & Accessories . . . . .	.700
Lifebuoy Holders . . . . .	.701 - 702
Rescue Device Bracket . . . . .	.701
Life Raft Bracket . . . . .	.702
Rope Hanger . . . . .	.702
Light Holders . . . . .	.702
Sea Brakes / Sea Anchors . . . . .	.703
<b>Lifejacket / Life Raft / Lifebuoy Lights</b>	
Lifejacket Lights . . . . .	.704
Life Raft Lights . . . . .	.704
Lifebuoy Lights . . . . .	.705
<b>Safety Lights</b>	
Safety Lights. . . . .	.706 - 711
<b>Safety Equipment</b>	
Safety Equipment . . . . .	.712 - 714
Safety Kits . . . . .	.715 - 716
Fire Safety Gear . . . . .	.717 - 718
Air Horns . . . . .	.719
Megaphones . . . . .	.720
Sirens . . . . .	.720
<b>Paddles &amp; Oars</b>	
Oar Accessories. . . . .	.721
Aluminium Paddles . . . . .	.722
<b>Boat Hooks &amp; Tiller Extensions</b>	
Boat Hooks . . . . .	.723
Tiller Extension . . . . .	.724
Tube Holder . . . . .	.724
<b>Signal Shapes, Radar Reflectors &amp; Ladders</b>	
Signal Shapes . . . . .	.725
Radar Reflectors . . . . .	.725
Lead Lines . . . . .	.726
Pilot Ladders. . . . .	.726
Emergency Ladders . . . . .	.726
<b>First Aid Kits</b>	
First Aid Kits . . . . .	.727 - 728
<b>Registration - Letters &amp; Numbers</b>	
Registration - Letters & Numbers. . . . .	.729 - 730
<b>Flags &amp; Flag Accessories</b>	
Flags & Accessories . . . . .	.731 - 732
<b>Oil Safe®</b>	
Oil Safe® Lids . . . . .	.733 - 734
Oil Safe® Accessories . . . . .	.734 - 735
Oil Safe® Drums . . . . .	.736

## Governing Authorities

For all information regarding laws and regulations please contact your local authority in your state.



**QLD Maritime Safety**  
[www.msq.qld.gov.au/Safety/Safety-equipment-recreational-ships](http://www.msq.qld.gov.au/Safety/Safety-equipment-recreational-ships)  
 PH: 13 23 80



**NSW/ACT Maritime Safety**  
[www.rms.nsw.gov.au/maritime/safety-rules/safety-equipment/safety-equipment-table.html](http://www.rms.nsw.gov.au/maritime/safety-rules/safety-equipment/safety-equipment-table.html)  
 PH: 13 22 13



**VIC Maritime Safety**  
[transportsafety.vic.gov.au/maritime-safety/recreational-vessel-operators/powerboat/trip-preparation/safety-equipment](http://transportsafety.vic.gov.au/maritime-safety/recreational-vessel-operators/powerboat/trip-preparation/safety-equipment)  
 PH: 1800 223 022



**SA Maritime Safety**  
[www.sa.gov.au/topics/boating-and-marine/boat-and-marine-safety](http://www.sa.gov.au/topics/boating-and-marine/boat-and-marine-safety)  
 PH: (08) 8260 0554



Department of **Transport**

**WA Maritime Safety**  
[www.transport.wa.gov.au/imate/what-safety-equipment-do-i-need.asp](http://www.transport.wa.gov.au/imate/what-safety-equipment-do-i-need.asp)  
 PH: (08) 9435 7796



**NT Maritime Safety**  
[nt.gov.au/marine/marine-safety/marine-safety-guide](http://nt.gov.au/marine/marine-safety/marine-safety-guide)  
 PH: (08) 8924 7100



**TAS Maritime Safety**  
[www.mast.tas.gov.au/recreational/boating/](http://www.mast.tas.gov.au/recreational/boating/)  
 PH: 1300 135 513



**Australian Maritime Safety Authority - National Standards for Commercial Vessels**  
<https://www.amsa.gov.au/about/regulations-and-standards/national-standard-commercial-vessels-nscv>  
 PH: 1800 627 484



**Australian Sailing - Equipment Auditing**  
<https://www.sailingresources.org.au/safety/equipment-auditing/&quicklink=true/>



**International Convention for the Safety of Life at Sea (SOLAS)**  
[http://www.imo.org/en/About/Conventions/ListOfConventions/Pages/International-Convention-for-the-Safety-of-Life-at-Sea-\(SOLAS\)-1974.aspx](http://www.imo.org/en/About/Conventions/ListOfConventions/Pages/International-Convention-for-the-Safety-of-Life-at-Sea-(SOLAS)-1974.aspx)





## PFD1 - Standard Foam Relaxn®

Part No.	Description	Body Mass (kg)	Buoyancy
<b>PFD1</b>	Relaxn® Standard Foam PFD1	60+	100N

**PFD1-BULK** Relaxn® Standard Foam PFD1 100N - 20 Pack



- Constructed from a robust high visibility polyester fabric with inherent closed cell foam flotation.
- Generous neck opening, durable non corroding fastener and retroreflective patches and whistle.
- 25mm adjustable belt with side release buckle.
- Australian Standards AS1512 approved.



## Lifejacket - Coastal Approved 150N Rating

Part No.	Description	Buoyancy
<b>SAW565</b>	Approved Coastal Lifejacket	150N

- Fully approved multi-fit coastal Lifejacket complete with reflective tape and donning instructions.
- Standard EN396.
- Pealess whistle, lanyard, holder.



## Lifejacket - SOLAS Approved

Part No.	Dimensions (mm)	Type	Buoyancy
<b>50450</b>	545 x 310 x 95	Child	85N
<b>50452</b>	615 x 385 x 100	Adult	150N

- Retroreflective tape (EN12402-8), approved whistle and donning instructions.
- Two belt positions for Lifejacket light installation (in front or on the side).
- The belt has a hook at the end so that users can connect together for safety.
- Constructed in accordance to international regulations IMO MSC.200(80) & MSC.207(81)
- Child 15-40kg.



50450

50452



## Lifejacket - SOLAS Approved Foldable

Part No.	Open Dimensions (mm)	Folded Dimensions (mm)	Type	Buoyancy
<b>50454</b>	780 x 290 x 120	390 x 290 x 195	Adult	150N

- Ideal for use in boats or ships with limited storage as they can be easily folded and stored in tight areas such as under seats.
- Two belt positions for Lifejacket light installation (in front or on the side).
- The belt has a hook at the end so that users can connect together for safety.
- Constructed in accordance to international regulations IMO MSC.200(80) & MSC.207(81)



## PFD - Level 100 Child



**BURKE**

Part No.	Body Mass (kg)	Size	Chest Size (cm)	Colour	Buoyancy
<b>L1003XSY</b>	10-15	XXXS	55	Yellow	100N
<b>L1002XSY</b>	15-25	XXS	60	Yellow	100N
<b>L100XSY</b>	25-40	XS	85	Yellow	100N

- Approved to Australian Standard AS4758.1 Level 100.
- Inherent SSP foam flotation with durable polyester fabric shell.
- Heavy duty 10 moulded front zip.
- Low profile collar, grab handle and retroreflective patches.
- 38mm adjustable waist belt with side release buckle.
- Integrated adjustable crotch strap and whistle.

## PFD - Level 100 Adult



**BURKE**

Part No.	Body Mass (kg)	Size	Chest Size (cm)	Colour	Buoyancy
<b>L100SY</b>	40-60	S	95	Yellow	100N
<b>L100MY</b>	60-70	M	113	Yellow	100N
<b>L100LXLY</b>	70+	L/XL	135	Yellow	100N
<b>L1002XLY</b>	70+	XXL	155	Yellow	100N

- Approved to Australian Standard AS4758.1 level 100.
- SSP Inherent foam flotation.
- Durable polyester shell fabric.
- Heavy duty #10 moulded front zip.
- 38mm adjustable waist belt with side release buckle.
- Retro reflective patches.
- Low profile collar.
- Kill cord lanyard attachment ring and facility to attach SAFCR crotch strap.

## PFD - Level 50AP



**BURKE**

Part No.	Body Mass (kg)	Chest Size (cm)	Buoyancy
<b>AP50S</b>	40 - 60	Up to 95	50N
<b>AP50A</b>	60 - 70	Up to 155	50N

- Approved to Australian Standard AS4758.1 Level 50.
- Inherent foam flotation and durable polyester shell.
- Easy to use non corroding closure.
- Adjustable 38mm non removable waist strap.
- Ideal for use in boats with limited storage.

## PFD - Level 50

Part No.	Body Mass (kg)	Size	Chest Size (cm)	Colour	Buoyancy
M502XSR	15-25	XXS	70	Red	50N
M50XSR	25-40	XS	85	Red	50N
M50SR	40-60	S	95	Red	50N
M50MR	60-70	M	110	Red	50N
M50LXLR	70+	L / XL	135	Red	50N
M502XLR	70+	XXL	155	Red	50N

- Approved to Australian Standard AS4758.1 Level 50.
- Pflx inherent foam flotation.
- Durable polyester shell fabric.
- Heavy duty #10 chunky tooth moulded zip.
- 38mm adjustable waist belt with side release buckle.
- Hinged skirt and hip cut outs to prevent ride up.
- Accessory attachment point on chest for whistle or light.
- Kill cord lanyard attachment.



**BURKE**

## PFD - Level 50 Side Entry With Pocket

Part No.	Body Mass (kg)	Size	Chest Size (cm)	Colour	Buoyancy
D50XSR	40-50	XS	76-86	Red	50N
D50SR	40-60	S	86-96	Red	50N
D50MR	50-70	M	96-106	Red	50N
D50LR	70+	L	106-116	Red	50N
D50XLR	70+	XL	116-126	Red	50N

- Approved to Australian Standard AS4758.1 Level 50.
- SSP inherent foam flotation.
- Durable polyester shell fabric.
- Heavy duty #10 chunky tooth moulded zip.
- 38mm adjustable waist belt with side release buckle.
- Secure front storage pocket with drainage.
- Internal drainage mesh.



**BURKE**

## PFD - Pet

Part No.	Body Mass (kg)	Size	Colour
DOG001S	Up to 4	S	Yellow / Carbon
DOG001M	Up to 9	M	Yellow / Carbon
DOG001L	Up to 18	L	Yellow / Carbon
DOG001XL	18+	XL	Yellow / Carbon

- Designed for maximum comfort for your pet, the Pet PFD comes with side release clips for easy fitting and a grab handle on top to help lift your pet on and off the boat.
- Side release clips for easy fitting.
- Tough nylon fabric.
- Easy fit design with quick release buckles.
- Padded neck enclosure.
- Webbing handle for lifting.



**BURKE**





Relaxn® Inflatable lifejacket range is perfect for all water activities. Do not waste time looking for that PFD in an emergency, the slim fit design is comfortable enough for continuous wear. These auto and manual inflatable lifejackets give you 50% more flotation than standard lifejackets.



Offshore use



Minimum 150 Newtons



## Inflatable PFD - Auto and Manual Inflation Relaxn®



PFDMANUAL

PFDAUTO

Part No.	Description	Buoyancy
PFDMANUAL	Relaxn® Manual Inflation PFD	150N
PFDAUTO	Relaxn® Automatic Inflation PFD	150N

- 150 Newtons.
- **Australian Standard AS4758.1 approved.**
- All purpose inflatable PFD suitable for a vast array of activities from rock fishing to offshore sailing.
- Standard nylon collar.
- Available in either manual or automatic with a 33 gram CO<sub>2</sub> cylinder.
- UML mechanism.
- Features an oral inflation tube.
- The slimline design is comfortable enough for continuous wear and has a grab strap, extra loop for attaching a safety line, easy to adjust waistband, reflective tape and whistle.
- Suitable for a body mass of 40kg and over.

### PFDMANUAL

- The manual model features pull cord activation.

### PFDAUTO

- Soft neoprene collar for comfort.
- UML pro sensor elite mechanism.
- The automatic model will inflate when submersed in water, as a backup it is also equipped with pull cord activation.



Soft neoprene collar for comfort (PFDAUTO only)



## Inflatable PFD - Manual Waist Bag Relaxn®



Stylish Packaging

Part No.	Description	Buoyancy
50466	Relaxn® Manual Inflatable PFD Waist Bag	150N
50466-BULK	Relaxn® Manual Inflatable PFD Waist Bag 150N - 10 Pack	









- 150 Newtons.
- **Australian Standard AS4758.1 approved.**
- This PFD is designed to be worn around the waist.
- Ideal for fishing, kayaking or any activity requiring a PFD.
- Meets Australian standards while being less restrictive.
- 2 part donning.
- Tear open Velcro.
- Place the bladder over your head, use the manual pull cord to activate.
- 33 gram CO<sub>2</sub> cylinder.
- UML mechanism.
- Oral inflation tube.
- Easy to adjust waistband, reflective tape and whistle.
- Suitable for a body mass of 40kg and over.







## Inflatable PFD - Deluxe Relaxn®

Part No.	Description	Buoyancy	
 <b>50462</b>	Relaxn® Deluxe Manual Inflation PFD 150N	150N	
 <b>50462-BULK</b>	Relaxn® Deluxe Manual Inflation PFD 150N - 10 Pack		
 <b>50460</b>	Relaxn® Deluxe Automatic Inflation PFD 150N	150N	
 <b>50460-BULK</b>	Relaxn® Deluxe Automatic Inflation PFD 150N - 10 Pack		

- 150 Newtons.
- **Australian Standard AS4758.1 approved.**
- All purpose inflatable PFD suitable for a vast array of activities from rock fishing to offshore boating.
- Soft neoprene collar for extra comfort.
- Back support for easier fitting and higher comfort.
- The slim, sleek model is designed for comfort, easy fitting and continual use.
- Inspection window on the right side.
- Available in either manual or automatic with a 33 gram CO<sub>2</sub> cylinder.
- UML pro sensor elite mechanism.
- The manual model features pull cord activation.
- The automatic model will inflate when submersed in water, as a backup it is also equipped with pull cord activation.
- Manual and automatic feature an oral inflation tube.
- Includes grab strap, extra loop for attaching a safety line, easy to adjust waistband, reflective tape and whistle.
- Suitable for a body mass of 40kg and over.



50462

50460



Stylish packaging



Inspection window



Soft neoprene collar on both Auto and Manual PFD's



Back support



## Inflatable PFD - Recharge Kit Relaxn®


Part No.	Description	
 <b>50458</b>	Inflatable CO <sub>2</sub> Replacement Canister 33g	

- 150N 33g CO<sub>2</sub>.
- Suitable for recharging Relaxn, Burke and many other 150N inflatable PFD's.
- Kit contains 33 gram CO<sub>2</sub> cylinder with safety indicators to fit UML and Halkey inflation mechanism.

*NOTE: Automatic inflation cartridge.*



## Inflatable PFD - Rearming Kit Relaxn®

Part No.	Description	
 <b>50459</b>	Inflatable Auto Rearming Kit Pro Sensor Elite	

- Launched in 2017 the Pro Sensor Elite® Automatic Inflator replaces the Pro Sensor® Automatic Inflator.
- 13mm shorter and 4 grams lighter than the original Pro Sensor® Automatic Inflator
- The automatic capsule contains a powerful spring which is compressed and retained in place using a paper element. Once wet the spring is release and the Co<sub>2</sub> canister is pierced, inflating the jacket.





Inflatable PFD - Burke



	Part No.	Description	Buoyancy	
	ISSM1500	Burke Manual Inflation PFD	150N	
NEW ENTRY	ISSM1500-BULK	Burke Manual Inflation PFD 150 N - 10 Pack		
	ISSA1501	Burke Automatic Inflation PFD	150N	
NEW ENTRY	ISSA1501-BULK	Burke Automatic Inflation PFD 150N - 10 Pack		





- 150 newtons.
- **Australian Standard AS4758.1 approved.**
- All purpose inflatable PFD suitable for a vast array of activities from rock fishing to offshore sailing.
- Standard nylon collar.
- Available in either manual or automatic with a pull cord to trigger the 33 gram CO<sub>2</sub> cylinder.
- The automatic model will inflate when submersed in water, but as a backup it is also equipped with an oral inflation tube.
- The slimline design is comfortable enough for continuous wear and has a grab strap, extra loop for attaching a safety line, easy to adjust waistband, reflective tape and whistle.
- Suitable for a body mass of 40kg and over.
- Provides 50% more flotation than traditional lifejackets.











## Inflatable PFD - Whip - Harness

Part No.	Description	Buoyancy
 <b>BCHM1880</b>	Burke Whip 150N Inflatable Manual Lifejacket	150N 
 <b>BCHA1890</b>	Burke Whip 150N Inflatable Automatic Lifejacket	150N 

- Velcro closure & integrated bladder for effortless repacking.
- Comfortable, neoprene neck collar.
- Soft D-loop tether attachment.
- Integrated harness.
- Available as manual or automatic CO<sub>2</sub> gas inflation.
- Rated 150 newtons of buoyancy.
- Heavy duty nylon cover.
- Retro reflective tape patches.
- Adjustable waistband.
- Integrated crotch strap.
- Quick-release openings to access oral inflation tube & gas inflation mechanism.
- Grab strap.
- Whistle.
- Toggle to fit wet weather jacket.
- Suitable for body mass of 40kg and over.
- The automatic model inflates when submerged in water.
- **Australian Standard AS4758.1 approved.**

**BURKE**

## Inflatable PFD - Navigator - Harness

Part No.	Description	Buoyancy
 <b>BCHM1700</b>	Burke Navigator 150N Inflatable Manual Lifejacket	150N 
 <b>BCHA1750</b>	Burke Navigator 150N Inflatable Automatic Lifejacket	150N 

- Rated 150 newtons of buoyancy.
- Integrated harness.
- Ergonomic design.
- Comfortable, neoprene neck collar.
- Soft D-loop tether attachment.
- Mesh lined comfort back support.
- Available as manual or automatic CO<sub>2</sub> gas inflation.
- Heavy duty neoprene cover with zip closure.
- Retro reflective tape patches.
- Adjustable waistband.
- Integrated crotch strap.
- Quick-release openings to access oral inflation tube & gas inflation mechanism.
- Grab strap.
- Whistle.
- Toggle to fit wet weather jacket.
- Double sealed bladder.
- Suitable for body mass of 40kg and over.
- The automatic model inflates when submerged in water.
- **Australian Standard AS4758.1 approved.**

**BURKE**

## Inflatable PFD Spares / Harnesses

### Inflatable PFD - Recharge Kit



**BURKE**

Part No.	Description
<b>IB2433</b>	150N 33G CO <sub>2</sub> Inflatable PFD Recharge Kit

- 150N 33g CO<sub>2</sub>.
- Suitable for recharging Burke, Relaxn 150N and many other inflatable PFD's.
- Kit contains 33 gram CO<sub>2</sub> cylinder with safety indicators to fit UML and Halkey inflation mechanism.

*NOTE: Automatic inflation cartridge / bobbin sold separately.*

### Inflatable PFD - UML Auto Cartridge



**BURKE**

Part No.	Description
<b>IB2520</b>	UML Auto Cartridge

- Hermetically sealed contains one UML black cartridge for Burke Automatic models fitted with UML auto inflation mechanism.

*NOTE: 33g CO<sub>2</sub> recharge kit IB2433 also required to rearm 150N automatic gas inflation models.*

### Multipurpose Crotch Strap



**BURKE**

Part No.	Description
<b>SAFCR</b>	Multipurpose Crotch Strap

- Burke multipurpose crotch strap to fit most types of PFD's.
- Prevents your PFD from slipping over your arms if you need to jump into the water.

### Harness - Adult



**BURKE**

Part No.	Description	Suits Chest Size (cm)
<b>SAFBH4</b>	Adult Safety Yachting Harness	96 - 130

- A robust safety harness approved for National and International yacht racing.
- Fitted with an anti-tangle back separator, reflective tape and two toggles to attach to a sailing jacket.
- Features fully adjustable shoulder straps and waistband with non-magnetic stainless steel fittings with a sturdy D-ring for safety line attachment.
- Tested and approved to EN 1095.
- Five year warranty.

### Harness - Child



**BURKE**

Part No.	Description	Suits Chest Size (cm)
<b>CHI225</b>	Child Safety Yachting Harness	44

- Specially designed beaver tail crutch strap which enables the child to be lifted and carried.
- Suitable for children from 18 months to 6 year and up to 20 kg.
- High strength synthetic webbing and sewing with stainless steel buckles and carabena clip.
- Adjustable shoulder and waist band.
- Tested and approved to EN1095/EN ISO 12401.
- Non-magnetic stainless steel fittings with a sturdy D-ring for safety line attachment are fitted on the back.





### Rigid Seat Bosuns Chair

Part No.	Description
<b>BOS212</b>	Rigid Seat Bosuns Chair

NEW  
ENTRY

- Designed for use when working up the mast.
- The sit-in design offers good support, manoeuvrability and maximum comfort.
- Using high-strength, double layer, 48mm lifting strap with two reinforced loops for halyard attachment.
- Crutch strap.
- Down Haul/Lazy guy attachment point
- Padded timber seat.
- Synthetic webbing and material.
- High strength continuous load bearing strap.
- 2 Toolholder bags with lanyard rings.
- Back support with waist band.
- Tested to withhold over 500kg.



**BURKE**

### Rope Tidy Bags

Part No.	Description	Size	Dimensions L x W (mm)
<b>TID160S</b>	Rope Tidy Bags	Small	370 x 250
<b>TID160L</b>	Rope Tidy Bags	Large	500 x 290

NEW  
ENTRY

NEW  
ENTRY

- PVC coated polyester mesh for longer life.
- Expanding elasticised opening.
- UV and weather resistance.
- Fast draining.
- Ropes dry quicker in a mesh bag than conventional rope tidy bag.
- Pollution/dirt doesn't accumulate in the bottom of the bag.
- Higher volume design means more rope in one bag.
- Two reinforced attachment eyelets.



**BURKE**

### Jack Stay

Part No.	Description	Length (m)
<b>SAFJL12</b>	Jack Stay	12

- Maximum length of 12m.
- Stainless steel buckles and shackles.
- The Jackstay is tested to take a load of more than 2000kg.
- The Jackstay has a sewn loop at one end and an adjuster at the other end. Both ends should be attached to strong points that will take in excess of 2 tonnes each.
- Adjustment of the jackstay length is made by moving the webbing through the stainless steel buckle.
- It is important to keep the jackstay stored away from direct sunlight in a well ventilated space when not in use to prevent Ultra Violet degradation.
- It is also important to check that the strong points must not have any corners or sharp edges that may abrade or cut the webbing.



**BURKE**

## Lifebuoy Rings & Accessories

### Lifebuoy Rings



50121


50123 & 50124



Part No.	Inside Dia. (mm)	Outside Dia. Ø (mm)	Weight (kg)	Rope Type	Filling
50121	410	610	2.5	Nylon	Foam Filled
50123	440	750	2.8	Silver	Foam Filled
50123-BULK	Lifebuoy Ring 440mm x 750mm 2.8kg - 5 Pack				
50124	440	750	4	Silver	Foam Filled

- SOLAS approved.
- Reflective tape.
- Suitable for all vessels under survey.
- Italian made quality.

### Lifebuoy Rings - Relaxn®

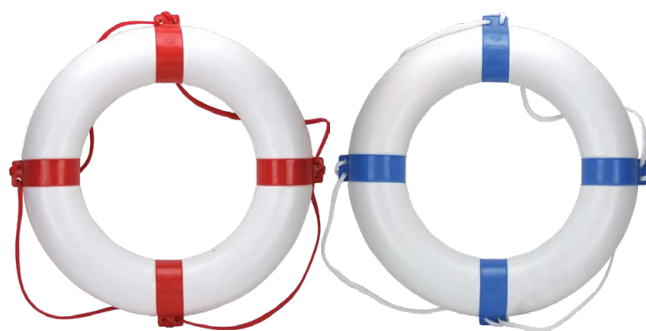

50590

50591



Part No.	Inside Dia. Ø (mm)	Outside Dia. Ø (mm)	Colour
50590	400	650	White with Red Stripe
50591	400	650	White with Blue Stripe

- Covered in a high quality welded PVC complete with surrounding safety line.
- Internal material is an oil resistant polystyrene.
- Italian made quality.

### Lifebuoy - Horseshoes



LIF220YA

LIF220HW



Part No.	Description	Colour
LIF220YA	Lifebuoy with Reflective Tape, Rope, Whistle & Clip	Orange
LIF220HW	Lifebuoy with Clip	White

- Made from flexible closed cell foam with zero water retention.
- Supplied with double coated PVC nylon cover.
- LIF220YA supplied with four retroreflective patches on each side, rope around the outside, a whistle and complies with Australian Sailing regulations.
- All lifebuoys can be opened and closed using the side release clip.

### Lifebuoy - Horseshoe Cover



Part No.	Description	Colour
LIF222B	Burke Horseshoe Lifebuoy Cover	White

- The ideal way to protect your Burke Horseshoe floats from UV and salt water damage and ensures your boat always looks tidy.
- Made from PVC with Velcro top opening flap, a drainage hole and four attachment points to ensure it's easy to attach to almost any vessel.



## Throw Line

Part No.	Description	Dimensions L x W (mm)
<b>50138</b>	Throw Line	500 x 110

NEW ENTRY

- 30 metres of 8mm polyethylene hollow braid rope.
- Attach a lifebuoy.
- Pull rope loose.
- Hold the handle.
- Throw the lifebuoy.




Image is shown with extras



CAN5B  
Marine Plastics

## Lifebuoy Container

Part No.	Description	Dimensions L x W x D (mm)
<b>50136</b>	Lifebuoy Container	900 x 900 x 220

NEW ENTRY

- Designed to hold a standard 75cm O.D lifebuoy.
- Moulded polyethylene, suits 100mm x 50mm posts.
- Inspection port.
- Rubber lock.



Inspection port



Rubber ball lock



CAN5B  
Marine Plastics

## Lifebuoy Holder - Deluxe

Part No.	Description	Post Dimensions L x W (mm)	Base Plate Size (mm)
<b>50133</b>	1.5m Galvanized Plated Bracket	60 x 40	300 x 300
<b>50134</b>	2m Galvanized Plated Bracket	100 x 50	300 x 300
<b>50132</b>	Emergency Lifebuoy Holder		

- Designed to hold a standard 75cm O.D lifebuoy.
- Moulded polyethylene.
- **50133 / 50134:** Reinforced base plate with welded corner brackets.

NOTE: Lifebuoy and rope not included.



50133

50134



50132



Image is shown with extras

CAN5B  
Marine Plastics

## Lifebuoy Holders / Rescue Device Bracket

### Lifebuoy - Drogue



**BURKE**

Part No.	Description	Dimensions (mm)	
<b>DRO150N</b>	Burke Lifebuoy Drogue	Ø 210 x 310	

- The drogue attaches to a horse shoe float or dan buoy to reduce wind drift.
- The weighted drogue's flexible wire hoop springs open when removed from the pouch ready for an emergency.
- Supplied with storage pouch.
- Complies to Australian sailing regulations.

### Rescue Buoy



**CANSA**  
Marine Plastics

Part No.	Description	Dimensions (mm)
<b>50127</b>	Rescue Buoy	700 x 280

- Personal rescue device (hollow).
- 2.5Mtr rope with Velcro strap.

### Lifebuoy Hook - Stainless Steel



50223

50223HD

Part No.	Description	Height (mm)	Width (mm)	Thickness (mm)	Mount Screws (mm)	
<b>50223</b>	Stainless Steel Lifebuoy Hook	175	19	2	6 c/s	
<b>50223HD</b>	Stainless Steel Lifebuoy Hook	175	25	3	6 c/s	

- 304G stainless steel.
- Stainless steel lifebuoy hooks suitable for hanging all types of lifebuoys.

*NOTE: Sold each.*

### Lifebuoy Holder - Stainless Steel



Part No.	Description	Suits Tube Dia.		
		Ø (mm)	Ø (in)	
<b>50578</b>	Stainless Steel Lifebuoy Holder	22 - 25	¾" - 1"	

- 304G stainless steel.
- Stainless steel holder suits life rings or horseshoe lifebuoys.
- Supplied complete with retaining cord and rail mount bracket which suits 22mm (¾") to 25mm (1") rails.
- Supplied with stainless steel mounting bracket (deluxe).

### Lifebuoy Holder - Adjustable



Image is shown with extras

Part No.	Description	Suits (mm)	Mounting Plate Width (mm)	Adjustable Height (mm)	Suits Part No.
<b>50571</b>	Adjustable Lifebuoy Holder	750	60	360 - 475	<b>50123</b> <b>50122</b>

- Mirror polished stainless steel.
- Wall mounted.
- Stainless steel with a polished finish.
- Mounting bracket included.

*NOTE: Lifebuoy holder only.*






## Life Raft Bracket / Rope Hanger / Lifebuoy Hooks / Lifebuoy/Light Holders

### Lifebuoy/Light Holder

Part No.	Description
 <b>50239</b>	Stainless Steel Lifebuoy/Light Holder

- AISI 316 stainless steel.
- Stainless steel holder for wall mounting standard 75cm round lifebuoys and standard lifebuoy lights.
- Includes mounting hardware kit.

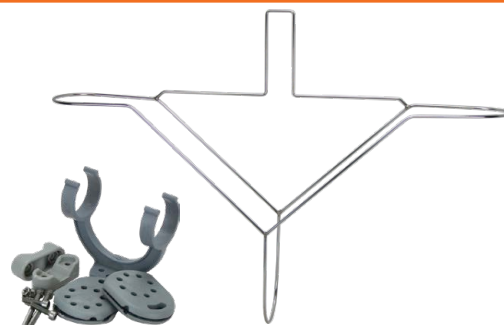

### Lifebuoy/Light Holder Horseshoe

Part No.	Description
<b>50577</b>	Stainless Steel Horseshoe lifebuoy/Light Holder


- AISI 316 stainless steel.
- Specifically designed to house a horseshoe lifebuoy of any size and a safety light.
- Can be secured either horizontally or vertically to a 19 to 25mm rail.



### Life Raft Bracket - Adjustable Stainless Steel

Part No.	Description
<b>50575</b>	Stainless Steel Adjustable Life Raft Bracket

- Holds 4 to 10 man life rafts.
- 316G stainless steel tube.
- Fully adjustable width 700mm to 850mm
- Bracket dimensions 750mm x 520mm x 200mm.
- Includes 4 mounting brackets for mounting to deck or railing.
- Fully adjustable strap with stainless steel and brass padlock included.
- Fasteners included.

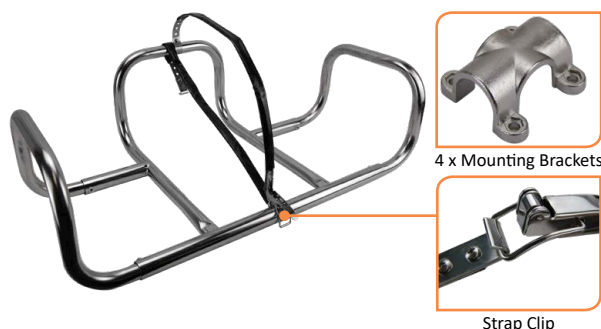


### Rope Hanger 4 Hooks - Stainless Steel

Part No.	Description	Length (mm)	Height (mm)	Mount Screws (mm)
 <b>50218</b>	Rope Hanger 4 Hooks	400	130	7 r/h


- 304G stainless steel.




### Rescue Device Bracket with Clamps - Stainless Steel

Part No.	Description	Suits Tube Rail Ø (mm)	Dimensions (mm)	Weight (kg)
 <b>50574</b>	Rescue Device Bracket with Clamps	25	105 x 65	0.42

- 304G stainless steel.

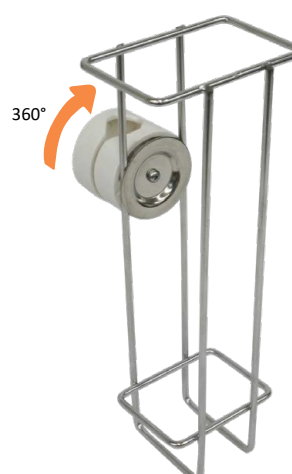

## Seabrake Drogue

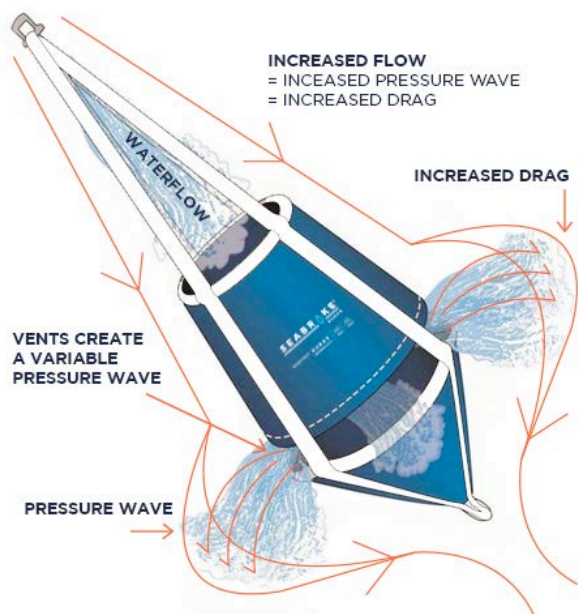

Part No.	Description	Suits Boat Size		Tow Line Size	
		(ft)	(m)	(in)	(mm)
SEAGP24	Seabrake Drogue	10 - 35	6 - 11	5/16"	14
SEAGP30	Seabrake Drogue	36 - 55	11 - 16	5/8"	16
SEAGP48	Seabrake Drogue	56 - 75	16 - 22	3/4"	19
SEAGP60	Seabrake Drogue	75 - 95	22 - 29	3/4"	19

- Seabrakes unique principle operates through the disbursement of water flow to induce local turbulence creating a variable pressure wave which is activated by speed through the water.
- The greater the flow through the unit, the greater the drag effect.
- As the water is disbursed evenly through the 4 exhaust ports at the base of the Sea brake it tracks truly with no rotation, providing endless hours of tangle free operation and reliability.

### Benefits:

- Scientifically trialled & tested.
- Easy to operate and retrieve.
- Compact and easy to stow.
- Effective and thoroughly reliable.
- Does not rotate and is tangle free.
- Has twice the drag of conventional sea anchors.
- Provides controlled restraint and tracks reliably.
- Reduces fatigue on both vessel and crew.
- An approved emergency steering device.
- An approved sea anchor (SOLAS).
- The "solution" for vessels under tow.
- Significantly reduces roll at anchor.
- Reduces motion sickness by dampening pitch and roll.
- An effective drift anchor for breakdowns and drift fishing.
- Adds stability and when streamed in following and quartering seas, will assist in maintaining a vessel's heading.
- Will keep a vessel's speed under control in a way similar to a cruise control on a motor vehicle.
- Can be used as an emergency steering device.

**BURKE**

## Sea Anchor - Collapsible



Part No.	Suits Boat Size Up To	Opening Ø (mm)	Height (mm)
SEA198C	23ft (6m-7m)	500	500
SEA199C	26ft (7m-8m)	610	610

- Controls your boats movements and reduces wind drift in open water when resting, eating, fishing, riding out rough weather and keeps your boat in the area longer if waiting for rescue.
- The Collapsible Sea Anchor comes with its own bag and is easily stored in a small space by simply collapsing the 2 diagonal support struts.
- Made from heavy nylon fabric and supplied with a rigid wire hoop, brass eyelets and rope splice clips, 6mm synthetic laid rope, a large nylon thimble attachment point and a retriever tag.



## Lifejacket / Life Raft / Lifebuoy Lights

### Lifejacket & Life Raft Lights

#### Lifejacket Light - Water Activated

Part No.	Main Dimensions (mm)	Mounting Clip Dimensions (mm)	LED Colour	Battery Type/Qty	Operation Time	Operation Temperature	Flash Rate	Weight (kg)
50142	44 x 43 x 31	51 x 9.8 x 9.9	White	Lithium Battery	20h+	-1°C - +30°C	51~54 times/min	0.028

- LED SOLAS Approved.
- Water-activation automatically on / manual off / manual on.
- The Lifejacket light is activated automatically when the water sensors are immersed in water.
- Once the light has been activated (and automatically switches on), the light sequence can be manually changed by pressing the button on the unit.
- Four light modes: With each press of the button the light sequence changes from FLASHING, STEADY, SOS to OFF. Once the light has been turned off it can only be switched back on by wetting the water sensors.
- Meets SOLAS regulation.
- Fits all life jackets and PFD's.
- Performance: Fire-resistant, Oil-resistant, Mould-proof, Corrosion-proof, Water-proof.

NOTE: Weight includes attachment clip.



#### Lifejacket Light with Bracket

Part No.	Main Dimensions (mm)	Mounting Clip Dimensions (mm)	LED Colour	Battery Type/Qty	Operation Time	Operation Temperature	Flash Rate	Weight (kg)
50160	45 x 19 x 31	51 x 9.8	White	CR2 Lithium battery	10h+	-1°C - +30°C	51~54 times/min	0.032

- LED SOLAS Approved.
- UML Lifejacket lights are extremely bright LED flashing Lifejacket lights which activate automatically when the small sensor at the end of their trailing wire, makes contacts with water.
- The UML light can be activated manually (both off and on) when the water sensor is in the water, by simply pressing the red button on the main body of the unit.
- SOLAS (LSA code 2.2.3) : MSC.81(70) & ISO12402-8:5.8n.
- Type of Light: Flashing type
- Luminous Intensity: 1.0 cd+.
- Storage Temperature: -30°C ~ +65°C.
- Visibility: Intense LED light visible for up to 2 miles (3.2 km).
- Activation: Water-activation automatically on / manual off / manual on.
- Performance: Fire-resistant, Oil-resistant, Mould-proof, Corrosion-proof, Water-proof.

NOTE: Weight includes attachment clip.



#### Life Raft Light - Water Activated

Part No.	Battery Body Dimensions (mm)	Lamp Cover Dimensions (mm)	LED Colour	Battery Type/Qty	Operation Time	Operation Temperature	Flash Rate	Weight (kg)
50148	62 x 73 x 33.5	Ø 62.5 x 42	White	Lithium Battery	12h+	-30°C - +65°C	51~54 times/min	0.26

- The external light and internal light are connected to the battery body by two individual wire-connectors.
- The battery powers both the internal and external lights.
- Pull cord activated.
- When the life raft is inflated, the battery can be activated by pulling the pull cord which will activate both of the lights at the same time.
- The external light is a high intensity flashing light for mounting externally on a life raft as a rescue signal.
- The internal light is a steady light for adequate visibility inside a covered life raft.
- The three units are sealed and watertight.
- Individual light switched for battery saving.
- Meets MED & SOLAS regulation.
- Light Output of External Light: 4.5 cd+.
- Light Output of Internal Light: 0.5 cd+.
- Storing Temperature: -30°C - + 65°C.
- Connector Wire Length: ≤2000mm.
- Fits all life rafts.
- Performance: Fire-resistant, Oil-resistant, Mould-proof, Corrosion-proof, Water-proof.



## Lifebuoy Lights

### Lifebuoy Light - LED

Part No.	Main Dimensions (mm)	Mounting Clip Dimensions (mm)	LED Colour	Battery Type/Qty	Operation Time	Operation Temperature	Flash Rate	Weight (kg)
50144	Ø 60 x L 144	35 x 40	White	2 x AA Alkaline Battery	8h+	-1°C - +30°C	51~54 times/min	0.114



- SOLAS Approved.
- Quality Standard: MSC.81(70) & BS ISO 24408:2005.
- Notified Body: RINA.
- Battery: 2 x AA Alkaline Battery.
- Lamp: Powerful LED.
- Type of Light: Flashing Type.
- Luminous Intensity: 2.0cd+.
- Storing Temperature: -30°C - + 65°C.
- Activation: Automatically turn on when the head of light is upward and automatically turn off when the head of the light is down.
- Performance: Fire resistant, Oil resistant, Mould proof, Corrosion-proof, Water proof, Resistance UV.

NOTE: Weight includes attachment clip.

### Lifebuoy Light - LED Water Activated

Part No.	Main Dimensions (mm)	Mounting Clip Dimensions (mm)	LED Colour	Battery Type/Qty	Operation Time	Operation Temperature	Flash Rate	Weight (kg)
50146	Ø 90 x 124	80 x 35	White	CR123 Lithium battery	8h+	-1°C - +30°C	51~54 times/min	0.21



- SOLAS Approved.
- Lamp: Powerful LED.
- Type of Light: Flashing type.
- Luminous Intensity: 2.0cd+.
- Storing Temperature: -30°C~+65°C.
- Activation: Water-activation automatically on/off.
- Performance: Fire-resistant, Oil-resistant, Mould-proof, Corrosion-proof, Water-proof, Resistance UV.

NOTE: Weight includes attachment clip.

### Lifebuoy Light - Bulb

Part No.	Description	Dimensions (mm)	Light Colour	Battery Type/Qty	Weight (kg)
50580	Lifebuoy Light - Bulb	360 x 120	White	4 x D Cell (6V)	0.4
50582	Stainless Steel 316 Grade Lifebuoy Holder suits ¾" & 1" Rails				
50579	Spare Bulb to suits 50580				



50580



50582

- Constructed from durable A.B.S acrylic.
- Supplied with 2.5mtr polyamide safety line.
- SOLAS Approved continuous light for commercial vessels.
- Approved by marine boards in Australia for use on commercial craft.
- Continuous Light.
- Made in Italy.

Notes: Battery not included.

### Lifebuoy Light - Comet

Part No.	Description	Length (mm)	Light Intensity	LED Colour	Battery Type/Qty	Bulb Volts	Bulb Amp	Weight (kg)
50125	Comet Lifebuoy Light	390	2 Candela	White	5 x Monocells 1.5V LR 20	4	0.6	1.08
50225	Black Plastic Mounting Bracket suits 50125							



50125



50225

- Optimal light diffusion through the milky dome lense.
- Activation: Self-activation by tilt switch.
- Safe on oil or petrol covered water.
- Supplied with 2.5mtr polyamide safety line.
- Conforming to SOLAS 74/88.
- Made in Germany.

NOTE: The mounting bracket is not included with the light but is also listed separately.





## Rocket Light - LED 4 x Battery

Part No.	LED Qty	Dimensions (mm)	Flash Colour	Battery Type/Qty	Operation Time	Flash Rate	IP	Weight (kg)
50268	4	285 x 51	White	4 x C Cell (6V)	Up to 360 hours	3 Seconds	68	0.12

- Constructed from durable A.B.S acrylic.
- Double O-ring seal.
- Self-activation, day-off and night-on.
- Fishing operations, marine engineering, warning of road works, camping, driving.

NOTE: Batteries not included.



## Strobe Light Bracket

Part No.	Description
50588	Strobe Light Bracket

- Suits 10mm - 30mm mounting post.
- Made from UV resistant plastic.
- Padded brackets to reduce vibrations.
- Life buoy light locks in place with a strap clip.
- Quick release clip.
- Spring loaded nut offers a securer tight lock to keep it from moving or falling off due to vibrations.



Release clip unlocked



Release clip locked



## Net Light - LED

Part No.	Dimensions (mm)	Waterproof To (m)	Flash Colour	Battery Type/Qty	Operation Time	Flash Rate	Visibility Distance (km)	Weight (kg)
50271	145 x 50	50	Yellow	1 x D Cell (1.5V)	20 Days	1.5 Seconds	4	0.12
50272	145 x 50	50	White	1 x D Cell (1.5V)	20 Days	1.5 Seconds	4	0.12

- Constructed from durable A.B.S acrylic.
- 4 x LED chips.
- Photocell activated: Day off, night on.

NOTE: Batteries not included.



## Net Light - LED Dual Battery

Part No.	Dimensions (mm)	Waterproof To (m)	Flash Colour	Battery Type/Qty	Operation Time	Flash Rate	Visibility Distance (km)	Weight (kg)
50279	188 x 52	50	Red & Orange	2 x D Cell (3V)	40 Days	1.5 Seconds	Up to 6	0.102

- Beam Angle: Omnidirectional 360°.
- 3 x LED chips.
- Photocell activated: Day off, night on.

NOTE: Batteries not included.



## Net Light - Strobe

Part No.	Dimensions (mm)	Waterproof To (m)	LED Colour	Battery Type/Qty	Operation Time	Flash Rate	Visibility Distance	Weight (kg)
50276	146 x 50	50	White & Red Flash	1 x D Cell (1.5V)	20 Days	2 Seconds	Up to 6km	0.12



- Constructed from durable A.B.S acrylic.
- Dusk to dawn switch.
- Xenon strobe.
- Photocell activated: Day off, night on.

*NOTE: Batteries not included.*

## Net Light - Strobe Dual Battery

Part No.	Dimensions (mm)	Waterproof To (m)	Flash Colour	Battery Type/Qty	Operation Time	Flash Rate	Visibility Distance	Weight (kg)
50277	280 x 54	50	White & Red Flash	2 x D Cell (3V)	23 Days	1.5 Seconds	Up to 6km	0.25



- Beam Angle: Omnidirectional 360°.
- Auto On / Off.
- Xenon strobe.
- Photocell activated: Day off, night on.

*NOTE: Batteries not included.*

## Flashing Light - LED 4 x Battery

Part No.	Dimensions (mm)	Flash Colour	Battery Type/Qty	Operation Time	Flash Rate	Visibility Distance	Weight (kg)
50294	129 x 48	White	4 x AA Cell (6V)	20 Days	1.5 Seconds	3km	0.11



- Constructed from durable A.B.S acrylic.
- 4 x LED chips.
- Suitable marine lights ocean and road.
- Photocell activated: Day off, night on.
- On-off switch.

*NOTE: Batteries not included.*

## Flashing Light - LED Solar Powered

Part No.	Dimensions (mm)	Flash Colour	Power Type	Flash Rate	Visibility Distance	Weight (kg)
50298	153 x 48	Red	Solar Power with Built-in Battery	1.5 Seconds	4km	0.18



- Constructed from durable A.B.S acrylic.
- 4 x LED chips.
- Suitable marine lights ocean and road.
- Photocell activated: Day off, night on.
- On-off switch.
- Solar rechargeable battery.



## Marker Light - LED Solar Powered

Part No.	Dimensions (mm)	Flash Colour	Power Type	Lens	Flash Rate	Visibility Distance	Screw Size (mm)	Weight (kg)
50290	75 x 135	Red	Solar Power with Built-in Battery	Acrylic	3 Seconds	4.8km	M5 x 65	0.2
50291	75 x 135	Yellow	Solar Power with Built-in Battery	Acrylic	3 Seconds	4.8km	M5 x 65	0.2

- Constructed from durable A.B.S acrylic.
- 4 x LED chips.
- Suitable marine lights ocean and road.
- Battery Life: 2 years.
- Fits 41 mm pole (use with 56002 holder and 'beehive' floats).
- Photocell activated: Day off, night on.
- On-off switch.
- Solar rechargeable battery.

NOTE: 1 x bolt & nut supplied.




## Beacon Light - Solar Powered

Part No.	Dimensions (mm)	IP Rating	Light Colour	Power Type	Lens	Battery Type	Screw Size (mm)	Flash Rate	Visibility Distance	Weight (kg)
50300	177 x 185	68	Red	Solar Power with Built-in Battery	Polycarbonate Resin	2V / 5Ah Rechargeable Battery	M8 x 75	3.5 Seconds	5km	2
50301	177 x 185	68	Yellow	Solar Power with Built-in Battery	Polycarbonate Resin	2V / 5Ah Rechargeable Battery	M8 x 75	3.5 Seconds	5km	2
50302	177 x 185	68	Green	Solar Power with Built-in Battery	Polycarbonate Resin	2V / 5Ah Rechargeable Battery	M8 x 75	3.5 Seconds	5km	2
50303	177 x 185	68	White	Solar Power with Built-in Battery	Polycarbonate Resin	2V / 5Ah Rechargeable Battery	M8 x 75	3.5 Seconds	5km	2

- Constructed from durable A.B.S acrylic.
- Battery Life: 3 years.
- Solar rechargeable battery.
- Fits 56 mm pole.
- Photocell activated: Day off  
Night on



NOTE: 1 x Hex cap screw included.

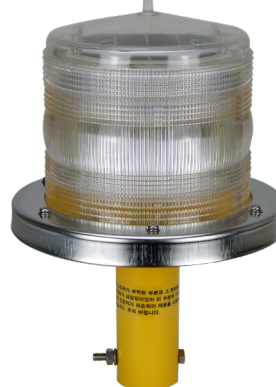

## Obstruction Beacon Light - Solar Warning

Part No.	Light Colour	IP Rating	Dimensions Ø x H (mm)	Power Type	Lens	Battery Type	Operation Temperature	Screw Size (mm)	Visibility Distance	Weight (kg)	
50340	Red	68	227 x 212	2.5W / 5V Solar Mono Panel	Polycarbonate Resin	3.6V / 5AH NI-MH Battery	-30 - +50 °C	M6 x 160	Up to 5km	1.5	NEW ENTRY
50342	Green	68	227 x 212	2.5W / 5V Solar Mono Panel	Polycarbonate Resin	3.6V / 5AH NI-MH Battery	-30 - +50 °C	M6 x 160	Up to 5km	1.5	NEW ENTRY
50344	White	68	227 x 212	2.5W / 5V Solar Mono Panel	Polycarbonate Resin	3.6V / 5AH NI-MH Battery	-30 - +50 °C	M6 x 160	Up to 5km	1.5	NEW ENTRY
50346	Yellow	68	227 x 212	2.5W / 5V Solar Mono Panel	Polycarbonate Resin	3.6V / 5AH NI-MH Battery	-30 - +50 °C	M6 x 160	Up to 5km	1.5	NEW ENTRY
50348	Brackets suits 50340 / 50342 / 50344 / 50346										NEW ENTRY

- Suitable boat, ship, seaport, fishery cage and buoy application.
- Rated IP68 and UV stabilised.
- Replaceable and recyclable lithium battery.
- 16 x LED chips.
- Beam Angle: 360°.
- Battery Life: 5 years.
- SW1 - Flash (ON)/Steady Switch.
- Toggle Switch: ON/OFF.
- SW2 - 4 Intensity Settings.  
100% ON - 1 Down / 2 Down  
75% ON - 1 Down / 2 Up  
50% ON - 1 Up / 2 Down  
25% ON - 1 Up / 2 Up
- CE, RoHS certified.

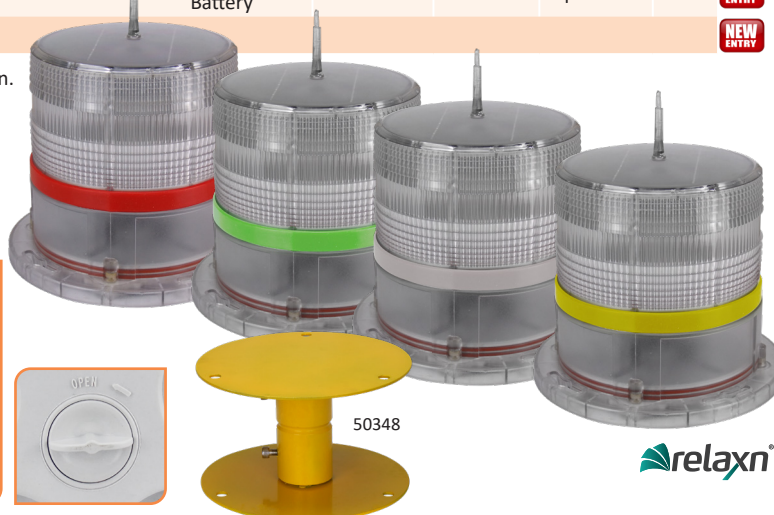

relaxn



## Safety Light - LED Solar 360° Anchor

Part No.	Dimensions (mm)	LED Chip Size	IP Rating	LED Colour	Frame Colour	Light Angle	Visibility Distance
<b>NEW ENTRY</b> 50152	115 x 73.2	24 x SMD 3020	67	White	Black	360°	2NM



- Will function as an anchor light automatically when the sun goes down without anybody having to be on board.
- Light Functions:
  - » Day/Night 360° White Steady (anchor)
  - » White SOS
  - » Obstacle - Add Indicative Position
- Mounting: Vertical or Tube 19-32mm.
- Rechargeable Battery: Lithium-Solar.
- Wireless Remote Control Distance: Max. 20Mtr.
- Operation Time: Steady > 12h.
- Storage Temperature: -30°C~+65°C.
- The first function utilises light-sensitivity activation to automatically turn on/off.
- The other functions can be activated manually or via the wireless remote.
- Up to 12h operation in steady mode.
- The rechargeable lithium battery is powered by Solar.
- 72 hours initial charge may be required.
- Rated IP67 water and dust protection.
- To maintain optimal battery life the unit requires charging every 3 months when not in use.
- Can be used on vessels up to 50 metres.
- CE and FCC Approval.
- 1 year warranty.



### Light Functions:

	Emergency Light Equipment 360° White Visability 2NM Max. Continuous Working Time: 12hrs	Wireless Remote Steady Light
	Indicating-Position Light 360° White Max. Continuous Working Time: 150hrs	Wireless Remote Single Flash 2s
	Distress Signal Light 360° White Max. Continuous Working Time: 20hrs	Wireless Remote SOS Signal
	Obstacle Light 360° White Max. Continuous Working Time: 150hrs	Light Activated Day/Night Quick Flash

### Includes:

- 1 x Shim
- 1 x Wireless Remote
- 1 x Instruction
- 1 x Anti Bird Thorn
- 2 x Nuts
- 6 x Screws
- 6 x Clips

### Applications:

- Small Ships
- Yachts
- Fishing Boats
- Kayaks
- Jetties
- Pontoon
- Watercraft
- Vessels up to 50m



## Safety Light - LED Solar / Wind Navigation

Part No.	Volts (V)	Watts (W)	Dimensions (mm)	LED Chip Size	IP Rating	LED Colour	Frame Colour	Visibility Distance
 <b>50154</b>	8-33	<4.5	115 x 99.1	27 x SMD 3020, XB-D, CPDP	56	Tricolour (Port/Starboard/Stern) All Round Red or White(Warning/Anchor Light)	Black	2NM

- Designed as a Navigation and Safety combination light.
- 8-33V light functions are hardwired and controlled via the vessels switch board.
  - » Navigation (Port, Starboard, Stern)
  - » Anchor Light (All Round White)
- Safety/Warning lights utilise the lithium battery which is charged via Solar, and External power source.
- Solar powered functions:
  - » Day/Night Red Flash 2s
  - » Red Flash 1s
  - » Red Steady
  - » White SOS
  - » White Steady (anchor)
- Mounting: Vertical or Tube 19-32mm.
- Rechargeable Battery: Lithium-Solar.
- Remote Control Distance: Max. 30Mtr.
- Storage Temperature: -30°C~+65°C.
- Solar powered functions will not operate while hardwired functions are in operation.
- 72 hours initial charge may be required.
- To maintain optimal battery life the unit requires charging every 3 months.
- Can be used on vessels up to 20Mtr.
- Designed according to the COLREG72, EN14744 and IEC60945 standards.
- 1 year warranty.

**Navigation Light Functions:**

Port, Starboard and Stern Light  
112.5° Red / 112.5° Green / 135° White  
Visibility 2NM

8-33V External  
Steady Light



Anchor Light  
360° White  
Visibility 2NM

8-33V External  
Steady Light

**Warning Light Functions:**

Obstacle Light  
360° Red  
Max. Continuous Working Time: 300hrs

Light Activated  
Flashing 2s



Indicating-Position Light  
360° Red  
Max. Continuous Working Time: 300hrs

Wireless Remote  
Flashing 1s



Trouble Indicating Light  
360° Red  
Max. Continuous Working Time: 12hrs

Wireless Remote  
Steady Light



Distress Signal Light  
360° White  
Max. Continuous Working Time: 20hrs

Wireless Remote  
SOS Signal



Emergency Light Equipment  
360° White  
Visibility 2NM  
Max. Continuous Working Time: 12hrs

Wireless Remote  
Steady Light

**Includes:**

- 1 x Shim
- 1 x L Shape Support
- 1 x Wireless Remote
- 2 x Nuts
- 1 x Instruction
- 6 x Screws
- 1 x Anti Bird Thorn
- 6 x Clips

**Applications:**

- Powerboats (length up to 20Mtr)
- Sailboats (length up to 50Mtr)
- Fishing Boats



## Torch - LED Waterproof Signalling



Part No.	Main Dimensions Ø x L (mm)	LED Colour	IP Rating	Battery Type/ Qty	Operation Time	Operating Temp	Storing Temperature	Weight (kg)
50170	42 x 105	White	67	Alkaline Battery	7h+	-10°C - + 70°C	-30°C - + 70°C	0.065

- LED SOLAS Approved Safety Torch.
- Quality Standard: ISO18813-2006.
- ON-OFF switch and morse code signal.
- Performance: Fire-resistant, Oil-resistant, Mould-proof, Corrosion-proof, Water-proof, Resistance UV, Floating.
- Luminous intensity: 150cd.
- Spare battery and LED included.

## Torch - LED Aluminium Telescopic Focusing

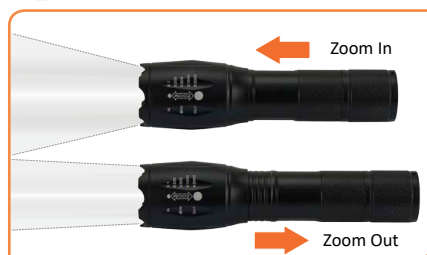

NEW ENTRY

Part No.	Main Dimensions Ø x L (mm)		LED Colour	IP Rating	Max Lumens (lm)	Battery Type/Qty	Visibility Distance	Weight (kg)
	Zoom In	Zoom Out						
50175	34 x 136	34 x 142	White	X6	2000	3 AAA Alkaline Batteries	5NM	0.315

- Ideal for camping, hiking, rescue, emergency and cycling.
- High-grade quality aluminium, with convex lens and tail cover.
- Unique wave design bezel designed to break windows in emergencies.
- Zoom - adjustable sliding head allows the intensity and illumination to be changed.
- Press the button to switch light modes - steady, strobe and SOS.
- High-powered LED bulb brighter than the traditional flashlight.
- Weather, water and shock resistant.
- Anti-skid grip and wrist strap with thoughtful handheld design.
- Lightweight and pocket-sized.
- LED lifespan: about 50,000 hours.

NOTE: Batteries are included.

## LED - Navigation Lights - Portable




Suction mount for  
709651/709654



709654

709651


Ideal for:



Part No.	Type	Lumens (lm)	Mount Type	Light Angle	Volts (V)	Amps (A)	Watts (W)	Height (mm)
709651	Bi-Colour	45	Screw/Suction	225°	4.5	0.1	0.5	97
709651-BULK	Bi-Colour Portable Navigation Light - 10 Pack							
709654	All Round White	45	Screw/Suction	360°	4.5	0.1	0.5	171
709654-BULK	Small All Round White Portable Navigation Light - 10 Pack							
709656	All Round White	45	Screw	360°	4.5	0.1	0.5	650
709656-BULK	Large All Round White Portable Navigation Light - 5 Pack							

- Ideal for small boats or kayak.
- Quick release pin for portability and storage.
- High-impact plastic construction.
- LED sealed polycarbonate housing.
- Water resistant switch.
- Multiple mounting options.
- Protection Rating: IP65.
- 3 x AAA batteries that will last up to 72 hours with normal use.
- 1 year warranty.

NOTE: Batteries not included.

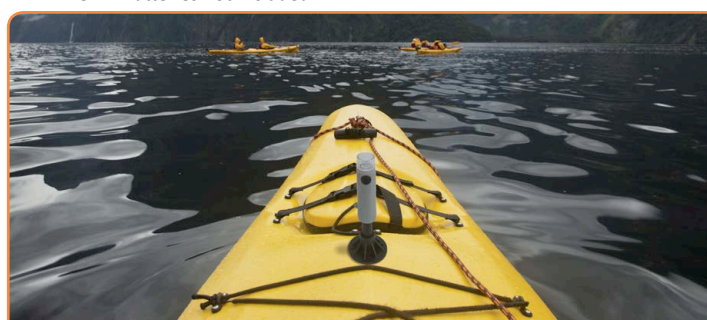





## Reflective Tapes - SOLAS Approved

Part No.	Description	Length (m)	Width (mm)
50120	SOLAS Approved Reflective Tape	9	50
50118	SOLAS Approved Reflective Tape	45	50
50118C	SOLAS Approved Reflective Tape	50	50

- 50118C - Precut every 400mm.



## Sail Repair Tapes

Part No.	Description	Length (m)	Width (mm)	Colour
50010	Sail Repair Tape Blue	7	50	Blue
50012	Sail Repair Tape Green	7	50	Green
50014	Sail Repair Tape White	7	50	White
50016	Sail Repair Tape Pink	7	50	Pink
50018	Sail Repair Tape Red	7	50	Red
50020	Sail Repair Tape Yellow	7	50	Yellow

- Self adhesive ripstop repair tape.
- Unit of Measure: Roll.

NOTE: Sold in full rolls only.



## Bird Scare Flag

Part No.	Description	Length (m)
BIR240B	Bird Scare Flag	7.9

- Made from PVC and sewn to a cord, this easy to install device is designed to scare birds away all year round.
- Colour may vary.



**BURKE**

## Marine Owl Scarecrow

Part No.	Description	Height (mm)
70120	Marine Owl Scarecrow	460

- A moulded plastic reproduction of an owl is designed to strike fear into the hearts of marauding seagulls, swallows and any other unwanted feathered friend.
- Painted to add realism, it has a wide hollow base so you can set it on the deck or a pole.



## Timber Bung

Part No.	Description	Length (mm)	Diameter Ø (mm)
50232	Timber Bung	150	20-45



## Safety Equipment

### Safety Throw Bag



**BURKE**

Part No.	Description	Rope Length (m)	Rope Dia. (mm)
THR152	Burke Safety Throw Bag	15.2	8

- Supplied with 15.2 metres of 3 strand floating line which stores securely in nylon bag.
- Easy to use, simply grasp the hand loop at the draw string end with your non-throwing hand and throw bag at target.
- Quick release draw string with toggle, webbing attachment handle with quick release buckle and clear instructions printed on the outside.

### V Sheet



Part No.	Description
50236	Safety Regulation V Sheet

- Required for any registered boat/PWC in certain water ways.
- Opens to 1.8 x 1.2 metres.
- Orange PVC sheet with large black V.
- Includes rope lanyards.
- Folds compact for easy storage.

### Bailing Scoops



52710

50008

Part No.	Size	Material	Colour	Dimensions (mm)	Capacity (Ltr)	Weight (kg)
52710	Small	Plastic	Orange	180 x 134 x 95	1	0.12
50008	Large	Plastic	Yellow	225 x 145 x 125	1.8	0.25

- Scoop shape to get the last of the water out.

### Signal Mirror - Deluxe



Part No.	Description	Size Ø (mm)
50237	Deluxe Signal Mirror	85

- Constructed from special unbreakable plastic which is noncorrosive and highly reflective.
- Meets international regulations.
- Hole in centre can be used to aim reflected light.

### Signal Mirror - Stainless Steel



Part No.	Description
50238	Standard Stainless Steel Signal Mirror

- Highly polished stainless steel.
- Resistant to corrosion and tarnish.

### Plastic Pealess Whistle



Part No.	Description	Dimensions (mm)
50584	Trem® Pealess Plastic Whistle	72 x 18

- Required for PFD1 jackets and many other safety products.
- Complete with attachment clip and lanyard hole.



## Safety Grab Bag

Part No.	Description
50244	Safety Grab Bag

- Buoyant, splash-proof bag offering a convenient way to store your smaller safety equipment - ready for the emergency you hope will never happen.



## Flare Container

Part No.	Description	Total Dia. (mm)	Opening Dia. Ø (mm)	Height (mm)
50245	Flare Container	160	95	310

- Water tight with 'O' ring seal & easy grip lid and handle.
- Suitable for holding up to 6 standard size flares or a combination of other small safety gear items.



## Safety Equipment Containers

Part No.	Description	Size (Ltr)	Dimensions W x H (mm)
50262	Safety Equipment Container	8	250 x 260
50263	Safety Equipment Container	12	250 x 380
50264	Safety Equipment Container	15	250 x 440

- White PVC container with a easy grip lid available in 3 sizes.
- Rubber O-ring inside the lid providing a water tight seal.
- Ample locations for attaching tie down string.
- Buoyant.



50262

50263

50264

## Flares

Part No.	Description
50200	Red SOLAS Approved Parachute Flare
50204	Red Hand Held Flare
50206	Orange Smoke Signal
50207	Regulation Flare Pack - Two Red & Two Orange smoke
50208	Buoyant Orange Smoke Signal

NOTE: Restricted freight applies to all dangerous goods.



50200



50204



50206



50207





## Gear Bag - Waterproof 30 Litre



Part No.	Description	Colour	Dimensions L x W x H (mm)	Bag Size (ltr)
<b>NEW ENTRY</b> 50388	Waterproof Gear Bag	Black	500 x 400 x 280	30
<b>NEW ENTRY</b> 50388-BULK	Waterproof Gear Bag Kit Black 30Ltr - 10 Pack			

- PVC coated fabric.
- Large opening.
- Reflective Logo.
- Heavy-duty polyester handles.
- Covered waterproof zip.
- Welded seams.
- D-ring for strap and accessory attachments.



Covered Heavy-Duty Zip



D-ring

PVC Coated Fabric

\*Tackle lockers not included



The Relaxn Gear Bag is ideal for a day trip

\*Tackle lockers not included



The Relaxn Gear Bag perfectly fits four Plano 3700 Series tackle inserts with room for extra tools.



## Safety Gear Kit - Waterproof 30 Litre - Inflatable



Part No.	Description	Bag Colour	Bag Size (ltr)
<b>NEW ENTRY</b> 50406	Waterproof Inflatable Safety Bag Kit	Black	30
<b>NEW ENTRY</b> 50406-BULK	Waterproof Inflatable Safety Bag Kit Black 30Ltr - 6 Pack		

- 30 litre internal volume, covered zips and heavy-duty polyester handle.
- **50406 kit includes:** 1 x Relaxn® black waterproof safety bag.  
1 x Safety regulation V sheet.  
2 x Telescopic mini paddles.  
1 x LED aluminium torch.  
1 x Signal mirror.  
1 x V-finder handbearing compass.  
4 x Deluxe Relaxn® manual Inflatable PFD 150N.  
1 x Small plastic bailer.



## Gear Bag - Waterproof 70 Litre

Part No.	Description	Colour	Dimensions L x W x H (mm)	Bag Size (ltr)	
50390	Waterproof Gear Bag	Black	600 x 330 x 350	70	NEW ENTRY
50390-BULK	Waterproof Gear Bag Black 70Ltr - 10 Pack				NEW ENTRY

- Ideal for keeping your gear dry.
- 100% waterproof PVC coated fabric.
- Tape sealed seams.
- Covered heavy-duty zips.
- Large hatch style opening.
- Reflective tape.
- Wraparound polyester carrying handles.
- External zipped pocket.



Reflective tape on the front and top panels



Reflectix

## Safety Gear Kit - Waterproof 70 Litre

Part No.	Description	Bag Colour	Bag Size (ltr)	
50401	Waterproof Safety Bag Kit	Black	70	NEW ENTRY
50401-BULK	Waterproof Safety Bag Kit Black 70Ltr - 10 Pack			NEW ENTRY
50403	Waterproof Safety Bag Kit - No Bailer	Black	70	NEW ENTRY
50403-BULK	Waterproof Safety Bag Kit Black 70 Ltr - No Bailer - 10 Pack			NEW ENTRY

- 70 litre internal volume, large hatch style opening, covered zips, external zipped pocket for all those small items and heavy-duty wraparound polyester handles with carrying clasp and end grab handle.

- **50401 kit includes:** 1 x Relaxn black waterproof safety bag.  
1 x Safety regulation V sheet.  
2 x Telescopic mini paddles.  
1 x LED torch.  
1 x Stainless steel signal mirror.  
4 x Standard foam PFD1's.  
1 x Small plastic bailer.
- **50403 kit includes:** 1 x Relaxn black waterproof safety bag.  
1 x Safety regulation V sheet.  
2 x Telescopic mini paddles.  
1 x LED torch.  
1 x Signal mirror.  
4 x Standard foam PFD1's.



50401 Includes:  
1 x Small plastic bailer  
1 x Stainless steel signal mirror



Reflectix

## Safety Gear Kit - Deluxe 70 Litre

Part No.	Description	Bag Colour	Bag Size (ltr)	Pack Qty
50400	Safety Gear Kit	Yellow	70	1
50402	Safety Gear Deluxe Kit	Yellow	70	10

- A must have for any boating enthusiast.
- PFD meets the Australian standards AS1512.
- **50400 kit includes:** 1 x 70ltr Burke bag.  
1 x Safety regulation V sheet.  
2 x Telescopic mini paddles.  
1 x LED torch.  
1 x Stainless steel signal mirror.  
4 x Standard foam PFD1's.

- **50402 kit includes:** 1 x 70ltr Burke bag.  
1 x Safety regulation V sheet.  
2 x Telescopic mini paddles.  
1 x LED torch.  
1 x Stainless steel signal mirror.  
4 x Standard foam PFD1's.  
1 x Large plastic bailer.  
1 x 1kg fire extinguisher.



Deluxe Kit also Includes:  
1 x Large plastic bailer  
1 x 1kg fire extinguisher



## Fire Extinguisher

Part No.	Size (kg)	Type	AS/NZ Standard	Still Air Fire Test Rating	Operating Pressure (kPa)	Discharge Time (sec)	Overall Height (mm)	Cylinder Dia. Ø (mm)	Effective Range (m)
50222	0.5	A B (E)	4353	n/a	1000	n/a	260	64	n/a
50233	0.6	A B (E)	1841.5	1A:5B:E	1000	12	300	65	n/a
<b>NEW ENTRY</b> 50233-BULK	Fire Extinguisher 0.6kg - 12 Pack								
50220	1.0	A B (E)	1841.5	1A:20B:E	1000	10	340	84.5	n/a
<b>NEW ENTRY</b> 50220-BULK	Fire Extinguisher 1.0kg - 12 Pack								
50229	2.5	A B (E)	1841.5	3A:40B:E	1000	13	400	118.5	n/a
50228	4.5	A B (E)	1841.5	3A:60B:E	1400	17	470	157	n/a

- Ideal for the home, car, boat, caravan and workshop.
- Suitable for all types of common fires including wood, paper, petrol, oil, diesel, fat and electrical fires.
- Dry powder.
- Class A. Ordinary Combustibles Class B Flammable Liquids Class E Electrical.
- Complies to Australian/New Zealand standards.
- Australian made quality.



50222



50233




50220



50228/50229

## Fire Extinguisher Test Tag



Part No.	Description
50228T	Fire Extinguisher Test Tag

## Fire Blanket



Part No.	Description	Dimensions (m)
50275	Fire Blanket	1 x 1

- Made from Woven Glass Fibre to quickly cover and extinguish a small fire without the use of a fire extinguisher.

## Fire Fighting Port



Part No.	Fibreglass Hole Diameter Ø (mm)	Outer Diameter Ø (mm)
50230	50mm	67mm

- The port allows for fire extinguisher access without having to open the engine box.
- Manufactured from high quality plastic and supplied with instructions.
- Italian made quality.





## Safety Labels

Part No.	Description	Label Type	Dimensions L x W (mm)
50312	Safety Label	First Aid	100 x 30
50313	Safety Label	Fire Extinguisher	100 x 30
50314	Safety Label	Flares	100 x 30
50315	Safety Label	EPIRB	100 x 30
50316	Safety Label	L.P. Gas Storage	100 x 30
50320	Safety Label	Turn Off Gas	100 x 60
50324	Safety Label	Life Jackets	175 x 25
50326	Safety Label	Lifebuoy	150 x 25

NEW ENTRY

- All labels use high quality 3M adhesive.
- 1.6mm thick plastic label.
- Laser engraved.



## Buckets - Stainless Steel

Part No.	Description	Bucket Type	Size (Ltr)
50602	Stainless Steel Bucket	Standard Fire	9
50604	Stainless Steel Bucket	Standard Small	9
50606	Stainless Steel Bucket	Standard Large	13
50608	Stainless Steel Bucket	Standard Ice	9



## Fog Horn - Plastic

Part No.	Description	Length (mm)
50750	Plastic Fog Horn	310

- Portable mouth operated fog horn with rope lanyard.



## Air Horn and Canister

Part No.	Description	Capacity (ml)
50003	Trem® Air Horn and Canister	250
50004	Trem® Gas Canister Replacement	250
50005	Trem® Plastic Mounting Bracket suit Trem® Air Horn	
50007	Replace Trumpet Suit 50003	

- Hand held and operated air horn ideal for a variety of sporting and industrial applications.
- Environmentally friendly canister does not contain any harmful gas.
- Refills and plastic mounting bracket available separately.
- **50005:** Bracket also suits EcoBlast™ Rechargeable Aluminium Air Horn.



## Siren - Hand Operated

Part No.	Description	Material	Dimensions (mm)	Weight (kg)
180018	Hand Operated Siren	Aluminium	210 x 140 x 240	1.2
180018P	Hand Operated Siren	ABS	210 x 140 x 240	0.6

- High sound output 108dB @ 1m.
- Compact and lightweight.
- No power supply required.
- Can be used in hazardous area.
- Frequency: 550Hz nominal (depends on speed of rotation).



## Air Horns

### Air Horn - Rechargeable



Part No.	Description
180020	Deluxe Aluminium Air Horn
180024	Deluxe Aluminium Air Horn with Pump
50005	Trem® Plastic Mounting Bracket suits EcoBlast™ Air Horn
180025	EcoBlast™ Canister Only
180026	EcoBlast™ Pump Only
180027	EcoBlast™ Trumpet Only

- Ideal for marine safety, camping, industrial safety and sporting events.
- Aluminium horn emits a powerful 115dB signal that meets all USCG requirements.
- Recharge using a mini air pump, bicycle pump or air compressor - supplied with two interchangeable valves for adaptability.
- Supplied with hand pump for quick and easy recharge.

**ECOBLAST™**

### Air Horns - Rechargeable Plastic



Part No.	Description
180028	Economy Plastic Air Horn
180032	Economy Plastic Air Horn with Pump

- Ideal for use as sporting events or within the marine and industrial safety industries.
- Recharge using a mini air pump, bicycle pump or air compressor - supplied with two interchangeable valves for adaptability.
- Emit a powerful 120 dB signal that meets all USCG requirements.


**ECOBLAST™**

### Air Horn - Rechargeable All Weather



Part No.	Dimensions (mm)	Volume	Max. PSI (BAR)
180034	279 x 254 x 279	120dB at 1Mtr 115dB at 2Mtr	90 (6)

- Ideal for marine safety, railway, mining, construction, highway and industry.
- Large capacity and all-weather utility,
- Impact resistance plastic.
- No need for replacement cartridges.
- Recharges with any source of compressed air.
- Each charge is good for up to 150 loud attention-getting blasts.
- Features a pressure gauge, a handy carrying handle and a detachable shoulder strap.



Comes with detachable shoulder strap



Activator - Flip up and fill with air



Pressure Gauge



Loud - 150 blasts per charge

**ECOBLAST™**



## Megaphone - Hand Grip with Siren

Part No.	Dimensions (mm)	Power (W)	Range (m)
 <b>180035</b>	W 299 x Ø 271.75 x H 188.8	Max. 10	250

- Power Supply: 6 x AA size battery.
- 13-17 hour speak time.
- Output Strength: Speak siren.
- Frequency Response: 200Hz - 20KHz.
- Material: ABS.




## Megaphone - Compact Power Hand Grip

Part No.	Description
 <b>180039</b>	Show® Compact Power Hand Grip Megaphone - No Siren
 <b>180040</b>	Show® Compact Power Hand Grip Megaphone - With Siren

- Audible up 500m (depending on weather conditions).
- 6 x AA batteries (not included) power the unit for approximately 8 hours of talking time.
- Compliant with safety evacuation regulations.



## Megaphone - Shoulder Strap

Part No.	Dimensions (mm)	Power (W)	Range (km)	Weight (kg)
 <b>180041</b>	Ø 150 x L 237	Max. 25	0.5-0.7	0.62

- Battery: 6 x "AA" type batteries (not included).
- NOTE: Weight not including batteries.



## Megaphone - Hand Grip and Shoulder Strap

Part No.	Dimensions (mm)	Power (W)	Range (km)	Weight (kg)
 <b>180043</b>	Ø 230 x L 340	Max. 25	0.5-0.7	1.65

- Battery: 8 x "C" type batteries (not included).
  - Show megaphones deliver the clear effective voice amplification especially for outdoor activities such as election, sport events or public occasions.
  - Built in, up to 60 seconds recording function.
- NOTE: Weight not including batteries.





### Rowlocks - Ring Galvanised



Part No.	Description	Material	Suits Oar Ø (mm)	Shank Dia. Ø (mm)
44090	Rowlock	Galvanised	65	10
44091	Rowlock	Galvanised	65	12.5

NOTE: Sold in pairs

### Rowlocks - Open



Part No.	Description	Material	Suits Oar Ø (in)	Shank Dia. Ø (mm)
44080	Open Rowlock	Nylon	2"	18
44082	Open Rowlock	Nylon	2-½"	18
44092	Open Rowlock	Galvanised	¾"	10
44093	Open Rowlock	Galvanised	7/16"	12.5

NOTE: Sold in pairs

### Rowlocks - Open Stainless Steel



Part No.	Description	Length (mm)	Top Width (mm)	Suits Oar Ø (mm)	Shank Dia. Ø (mm)
44060	S/S Open Rowlocks	122	53	50	12.5

• 316G stainless steel.

NOTE: Sold in pairs

### Top & Side Mount Rowlock - Stainless Steel



Part No.	Description	Length (mm)	Width (mm)	Height (mm)	Shaft Dia. Ø (mm)
44066	S/S Top & Side Mount Rowlock	100	52	40	13

• 316G stainless steel.

NOTE: Sold in pairs

### Side Mount Rowlock - Stainless Steel



Part No.	Description	Base Size (mm)	Shaft Dia. Ø (mm)
44068	S/S Side Mount Rowlock	89 x 25	13

• 316G stainless steel.

NOTE: Sold in pairs

### Top & Side Mount Rowlock - Socket Nylon



Part No.	Description	Colour	Size (mm)	Shaft Dia. Ø (mm)
44084	Nylon Top Mount Rowlock Socket	Black	95	18
44086	Nylon Side Mount Rowlock Socket	Black	70	18

• A nylon side mount rowlock socket, for holding oar rowlocks in place whilst rowing in a boat, that features a side hanging shaft and counter sunk fixing screw holes.

NOTE: Sold in pairs

### Oar Stops - Rubber



Part No.	Description	Length (mm)	Flange Dia. Ø (mm)	Inside Dia. Ø (mm)	Outside Dia. Ø (mm)
44100	Rubber Oar Stop	111	81	44	54

• The oar stops are easily fitted by lubricating the oar shaft with detergent and sliding into place.

NOTE: Sold in pairs.



## Paddle - Heavy Duty Telescopic

Part No.	Min./Max. Length		Shaft Dia. Ø (mm)	Blade Size (mm)	Shaft Colour	Blade Colour
	(Ft)	(m)				
<b>39170</b>	4-6	1.22-1.82	35 / 30	610 x 125	Silver	Grey

- Blade detaches from shaft providing easy storage.
- Telescopic shaft.
- Minimum shaft length is 730mm.



**relaxn'**

## Paddle - 'T' Grip

Part No.	Length		Shaft Dia. Ø (mm)	Blade Size (mm)	Shaft Colour	Blade Colour
	(Ft)	(m)				
<b>44118</b>	4	1.22	32	500 x 200	Silver	Black

**NEW ENTRY**



**relaxn'**

## Paddle/Boat Hook - 'T' Grip

Part No.	Length		Shaft Dia. Ø (mm)	Blade Size (mm)	Shaft Colour	Blade Colour
	(Ft)	(m)				
<b>44124</b>	4'4"	1.32	25	450 x 170	Silver	Black
<b>44124-BULK</b>	Paddle/Boat Hook 'T' Grip 4'4" - 20 Pack					

**NEW ENTRY**

- Suitable for use on canoes and small vessels.
- Moulded handle in the paddle end, allowing it to also be used as a boat hook.




**relaxn'**

## Paddle - Telescopic Mini

Part No.	Min./Max. Length (mm)	Inner/Outer Shaft Dia. Ø (mm)	Blade Size (mm)	Shaft Colour	Blade Colour
<b>44126</b>	530-1080	23-26	300 x 160	Silver	Safety Orange
<b>44126-BULK</b>	Telescopic Mini Paddle - 12 Pack				

**NEW ENTRY**

- Suitable for use on canoes and other small vessels.
- Adjustable twist turn handle so it can always be aligned with the blade.
- Telescopic aluminium adjustable twist lock shaft.
- Bright vivid colour.

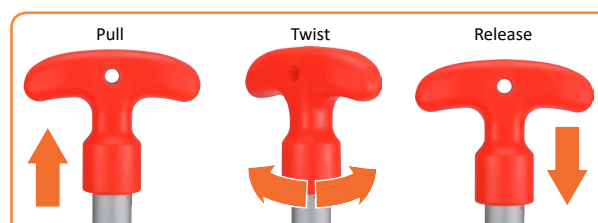

Adjustable twist turn handle

**relaxn'**

## Boat Hooks & Tiller Extensions

### Boat Hook - Premium



Part No.	Description	Handle Dia. Ø (mm)	Length (mm)
50900	Premium Boat Hook	35	1500
50902	Premium Boat Hook	35	2000
50907	Premium Boat Hook	30	2500

- Beautifully finished wood handle with chrome hook.



### Boat Hook - Anodised Aluminium




Part No.	Description	Dia. Ø (mm)	Length (mm)
50904	Anodised Aluminium Boat Hook	25	1800
50905	Anodised Aluminium Boat Hook	25	2100

- Anodised aluminium.



### Boat Hook - Telescopic

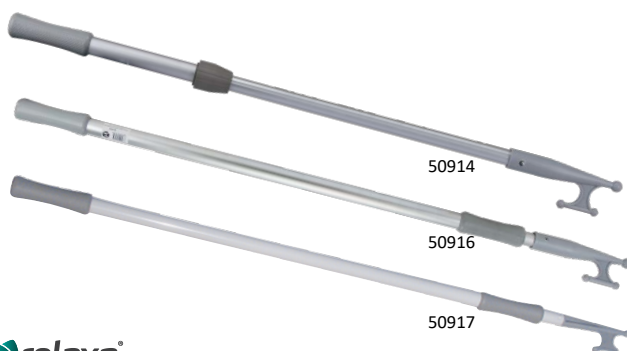

Part No.	Description	Dia. Ø (mm)	Min. Length (mm)	Max Length (mm)
50914	Telescopic Boat Hook	30 / 25	700	1000
50916	Telescopic Boat Hook	19-25	1550	2100
50917	Telescopic Boat Hook	30 / 25	1200	2100

- Anodised aluminium.
- Designed to fit into small spaces making an ideal space saver for small boats.
- 50917 - White finish.
- 50914 - Compact.



### Boat Hook - Extra Long Telescopic



Part No.	Description	Dia. Ø (mm)	Min. Length (mm)	Max Length (mm)
50919	Extra Long Telescopic Boat Hook	35 / 30 / 25	1300	2400

- 3 piece anodised aluminium.



### Boat Hook - Stainless Steel 316 Head Only



Part No.	Description	Suits Tube Ø (mm)
50901	Boat Hook - Head Only	28

- Suitable for fitting on wooden boat hook.
- 316 stainless steel.





## Tiller Extension & Tube Holder

### Boat Hook - Chrome Plated Brass Head Only

Part No.	Description	Suits Tube Ø (mm)
50906	Chrome Plated Brass Boat Hook - Head Only	28

- Chrome plated brass boat hook head that fits externally over 28mm aluminium tube or timber dowel.



### Boat Hook - Nylon Head Only

Part No.	Description	Suits Tube Ø (mm)
50908	Nylon Boat Hook - Head Only	25
50910	Nylon Boat Hook - Head Only	30

- Black moulded nylon boat hook head that fits externally over aluminium tube or timber dowel.



### Tiller Extension - Telescopic

Part No.	Description	Min Length (mm)	Max Length (mm)	Shaft Dia. Ø (mm)
50924	Telescopic Tiller Extension	600	1000	32

- Anodised aluminium handle which attaches to the outboard motor throttle handle via a wing nut locking collar.
- Allows the operator to sit or stand amidships of the dinghy to allow better ride and weight distribution for fuel savings and comfortable use.
- Easily and quickly fits to most outboard motors.
- A push-button so the engine can be easily switched off using the tiller extension.

NOTE: Push button to switch-off the engine.



### Tiller Extension - Fixed

Part No.	Description	Length (mm)	Shaft Dia. Ø (mm)
50926	Fixed Tiller Extension	740	25

NEW ENTRY

- Anodised aluminium handle which attaches to the outboard motor throttle handle via a wing nut locking collar.
- Easily and quickly fits to most outboard motors.
- A push-button so the engine can be easily switched off using the tiller extension.

NOTE: Push button to switch-off the engine.



### Tube Clips - Nylon

Part No.	Description	Colour	Base (mm)	Height (mm)	Suits Tube Ø (mm)	Mount Screws (mm)
35918B	Tube Clips	Black	46 x 12	30	20	3
35919	Tube Clips	Black	50 x 12	35	25	3
35922	Tube Clips	Black	77 x 15	50	40	5
35923	Tube Clips	Black	80 x 19	53	40-45	5

- Nylon tube clips with two fastening holes.
- Size is measured by outside diameter of tube.



### Tube Holder - Heavy Duty

Part No.	Description	Colour	Material	Suits Tube (in)
45500	Heavy Duty Tube Holder	Black	Nylon	¾"
45501	Heavy Duty Tube Holder	Black	Nylon	1"
45502	Heavy Duty Tube Holder	Black	Nylon	1-¼"
45503	Heavy Duty Tube Holder	Black	Nylon	1-½"
45504	Heavy Duty Tube Holder	Black	Nylon	1-¾"
45505	Heavy Duty Tube Holder	Black	Nylon	2-¼"
45506	Heavy Duty Tube Holder	Black	Nylon	3-¼"

- One screw fastening.



# Signal Shapes, Radar Reflectors & Ladders

## Signal Shapes, Radar Reflectors

### Day Signal Shapes




Part No.	Shape	Type	Colour	Dimension (mm)
50241	Ball	Nylon	Black	Ø 300
50242	Cone*	Nylon	Black	460 x 330
50243	Ball	Netting	Black	Ø 610
50243C	Cone*	Netting	Black	Ø 610
50243D	Diamond	Netting	Black	Ø 610


\*Use 2 x Cone shapes to make 1 x Diamond Shape.



50243

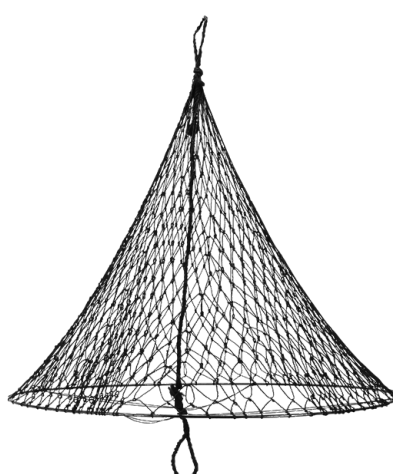


50243C

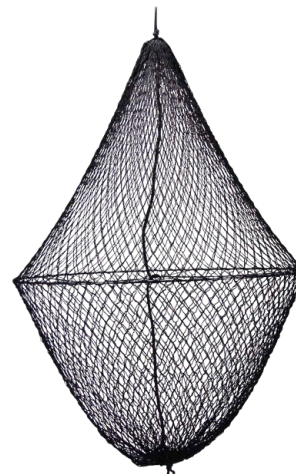

50243D

### Radar Reflectors

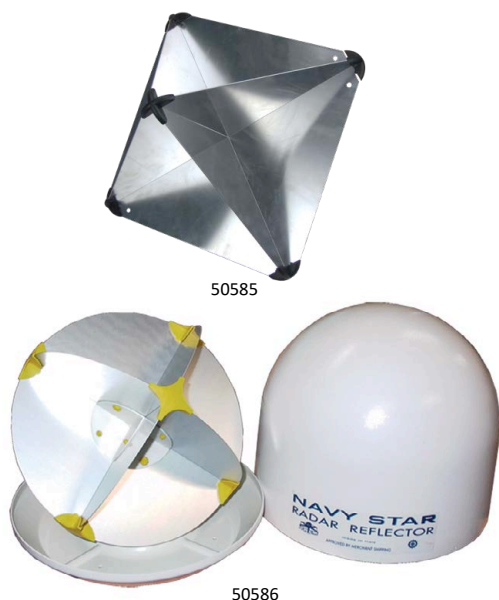

Part No.	Description
50585	Standard Radar Reflector
50586	Enclosed Radar Reflector Supplied with Container & Fastenings

- Compulsory for pleasure boats over 12 metres in some states.
- Approved radar reflector complying with international EN-ISO8729/IMO International Standards RES.A384(X).
- Manufactured from a high quality light aluminium.
- **50585** - Easily folds away for storage when not required.
- **50586** - Supplied with plastic protective case.
- Italian made quality.

### Radar Reflector - Tubular



Part No.	Description
50587	Echo Power T114 Tubular Radar Reflector

- Compulsory for pleasure boats over 12 metres in some states.
- Effective to at least 5 nautical miles.
- Manufactured from high quality aluminium and plastic.
- Approved Radar Reflector complying with international EN-ISO8727/IMO International Standards RES.A384(X).



## Lead Lines, Pilot Ladders & Emergency Ladders

### Lead Line

Part No.	Rope Type	Length (fathom)	Length (Ft)	Length (m)	Weight (kg)
46059	PP Multifilament	25	150	45.72	3.2
46061	Replacement Weight suits Lead Line				



### Ladder - Pilot

Part No.	Steps	Length (m)	Short Board Size (mm)	Long Board Size (mm)	Hole Dia. Ø (mm)
47237	19	6	525 x 115 x 28	1800 x 115 x 28	25
47238	30	10	525 x 115 x 28	1800 x 115 x 28	25



- Use by pilots to board or leave vessels.
- The distance between steps is  $330 \pm 20$ mm.
- Hardwood steps (except lower four steps).
- The lowest four steps are rubber plates with steel lining.
- SOLAS1974, as amended, A.1045(27).
- Supplied with test certificate.


NOTE: Other lengths and styles available to order.



### Ladder - Five Steps Emergency

Part No.	Description	Steps	Length (cm)
47276	Five Steps Emergency Ladder	5	134

- Strong plastic steps.
- Packed in a nylon case.





## First Aid Kits

### Marine First Aid Kit - Scale F



Part No.	Description
<b>50249</b>	Marine First Aid Kit - Scale F

- For survey: Class 1C - Unberthed, Class 1D - Berthed, Class 1E - Berthed and Class 2C - Berthed.
- Big Box Marine Kit for Larger Boats, the right kit for ocean and outer reef usage.
- Two Extra Deep Trays fixed with stainless steel cantilever arms, with eight medications as per F Scale Included.

*NOTE: Scale F first aid kits requires vessel or owners name.*

Marine First Aid Kit Included					
Items	QTY	Items	QTY	Items	QTY
Conforming Bandage 5cm x 1.5m	2	Eye Pad Dressing Sterile	4	Scalpel - Disposable	2
Conforming Bandage 10cm x 1.5m	2	Butterfly Closures (10 Pack)	1	Splint - 36" Formable "Sam Splint"	1
Crepe Bandage 7.5cm x 1.5m	2	Surgical Waterproof Tape 2.5cm x 5m	1	Splint - 9" Formable "Sam Splint"	1
Crepe Heavy Bandage 7.5cm x 1.5m	2	Surgical Waterproof Tape 5cm x 4.5m	1	Saline - 30ml	10
Crepe Heavy Bandage 10cm x 1.5m	2	Towels - Disposable (2 Pack)	3	Povidone Iodine Swab (Single Use)	20
Crepe Heavy Bandage 15cm x 1.5m	1	Plastic Bag (3 Pack Assorted)	2	Rapaid Antiseptic Cream 25g	1
Triangular Bandage Calico	4	Plastic Bag Large	2	Hydrocortisone 1% cream 30g	1
Combined Dressing 10cm x 10cm	3	Gloves Large - Disposable (Pair)	10	Paracetamol 500mg Caps or Tabs (24 Pack)	2
Combined Dressing 10cm x 20cm	5	Safety Pins - Stainless Assorted (12 Pack)	1	Paracetamol 500mg / Codeine 8mg (24 Pack)	1
Non-adherent Dressing 10cm x 10cm	10	Thermal Blanket	1	Ibuprofen 200mg Tablets (24 Pack)	1
Burnaid Dressing 10cm x 10cm	2	Instant Ice Pack	1	Hyoscine Hydrobromide 0.3mg Tablets (10 Pack)	1
Wound Dressing No. 15	3	Resuscitation Face Shield - Disposable	1	Loperimide 2mg Tablets (16 Pack)	1
Wound Dressing No. 13	2	Resuscitation Mask - Pocket	1	Loratadine HCl 10mg / Fexofenadine HCl 120mg Tablets (10 Pack)	1
Non Woven Fabric Adhesive Roll	1	Splinter Probe - Sterile, Disposable (5 Pack)	2	Antacid Tablets (50 Pack)	1
Fabric Dressing Strips (50 Pack)	1	Forceps / Tweezers 12.5cm	1	CPR Instruction Chart	1
Gauze Swabs 7.5 x 7.5 x (3 Pack)	9	Shears - Stainless Steel 19cm	1	First Aid Book A6	1

### Marine First Aid Kit - Scale G



Part No.	Description
<b>50251</b>	Marine First Aid Kit - Scale G

- For Survey: Class 1D - Unberthed 2D, 2E, 3C, 3D and 3E.
- Coastal Waters Deluxe Box 4 Medications for Medium Private Boats, the right kit for ocean to outer reef usage.
- Two Extra Deep Trays fixed with stainless steel cantilever arms.

*NOTE: Scale G first aid kits requires vessel or owners name.*

Marine First Aid Kit Included					
Items	QTY	Items	QTY	Items	QTY
Conforming Bandage 5cm x 1.5m	1	Eye Pad Dressing Sterile	2	Forceps / Tweezers 12.5cm	1
Conforming Bandage 10cm x 1.5m	1	Butterfly Closures (10 Pack)	1	Shears - Stainless Steel 19cm	1
Crepe Heavy Bandage 7.5cm x 1.5m	2	Surgical Waterproof Tape 2.5cm x 5m	1	Splint - Formable	1
Triangular Bandage Calico	4	Surgical Waterproof Tape 5cm x 4.5m	1	Saline - 30ml	6
Combined Dressing 10cm x 10cm	3	Towels - Disposable (2 Pack)	2	Povidone Iodine Swab (Single Use)	10
Combined Dressing 10cm x 20cm	2	Plastic Bag (3 Pack Assorted)	1	Rapaid Antiseptic Cream 25g	1
Non-adherent Dressing 10cm x 10cm	5	Plastic Bag Large	2	Paracetamol 500mg Caps or Tabs (24 Pack)	1
Burnaid Dressing 10cm x 10cm	1	Gloves Large - Disposable (Pair)	10	Hyoscine Hydrobromide 0.3mg Tablets (10 Pack)	1
Wound Dressing No. 15	2	Safety Pins - Stainless Assorted (12 Pack)	1	Loperimide 2mg Tablets (16 Pack)	1
Wound Dressing No. 13	2	Thermal Blanket	1	Antacid Tablets (50 Pack)	1
Non Woven Fabric Adhesive Roll	1	Instant Ice Pack	1	CPR Instruction Chart	1
Fabric Dressing Strips (50 Pack)	1	Resuscitation Face Shield - Disposable	1	First Aid Book A6	1
Gauze Swabs 7.5 x 7.5 x (3 Pack)	3	Splinter Probe - Sterile, Disposable (5 Pack)	1		



## Marine First Aid Kit - Category C &amp; G

Part No.	Description
<b>50253</b>	Marine First Aid Kit - Category C and G Rated

- Supplied in durable and splash proof plastic container.
- Category C and G Rated.
- 'O' Sealed Kit is for smaller boats for River or Bay.
- 35 Item Kit.



Marine First Aid Kit Included					
Items	QTY	Items	QTY	Items	QTY
Small Portable 'O' Ring Box Empty	1	Eye Pad Dressing Sterile	2	Rapaid Itch Sachet	2
Band Aids Waterproof 30 Box	1	Latex Gloves 1 Pair Pack Large	2	Basic Dressing Pack	1
Conforming Bandage 5cm x 1.5m	1	Sharps Container 10 Needle	1	Micropore Tape 1.25cm x 9m	1
Conforming Bandage 7.5cm x 1.5m	1	D'Lite Non Adhesive 7.5cm x 5cm	1	Strapping Tape Zinc 2.5cm x 5m	1
Crepe Heavy Bandage 10cm x 1.5m	1	D'Lite Non Adhesive 7.5cm x 10cm	1	Scissors Stainless Steel 12.5cm	1
Triangular Bandage Calico	2	Resuscitation Mask Non Return Valve	1	Tweezers Stainless Steel 11.5cm	1
Crepe Bandage 5cm x 1.5m	2	Rapaid Cream Sachet	2	Safety Pins 12 Card	1
Wound Dressing No. 13	1	First Aid Label 5cm x 5cm	1	Instant Ice Pack	1
Combined Dressing 10cm x 10cm	1	Sodium Chloride 15ml Steritube	3		

## Cat 5 First Aid Kit

Part No.	Description
<b>50248</b>	Cat 5 First Aid Kit



Marine First Aid Kit Included					
Items	QTY	Items	QTY	Items	QTY
Paracetamol 500mg or Ibuprofen 200mg	40	Crepe bandages 75mm x 1.5m	2	Normal Saline (For Washing) 250ml	1
Soluble Aspirin	20	Disposable gloves	10		
Scissors Stainless Steel	1	Low Absorbency Non-Adherent Dressing	5		
Band-aids or Equivalent roll of Band-aid	20	CPR mask x 1 or Face Shields x 6	-		

NOTE: Sunscreen 30+SPF 250ml also required, but not included in kit.





**ABCDEFGHIJKLM  
NOPQRSTUVWXYZ  
0123456789**

**ABCDEFGHIJKLM  
NOPQRSTUVWXYZ  
0123456789**

• Self adhesive.

NOTE: Sold in pairs.

### Letters and Numbers - 3"

3" (76mm) Black				3" (76mm) White			
Part No.	Letter	Part No.	Letter	Part No.	Letter	Part No.	Letter
23101-A	A	23101-S	S	23101W-A	A	23101W-S	S
23101-B	B	23101-T	T	23101W-B	B	23101W-T	T
23101-C	C	23101-U	U	23101W-C	C	23101W-U	U
23101-D	D	23101-V	V	23101W-D	D	23101W-V	V
23101-E	E	23101-W	W	23101W-E	E	23101W-W	W
23101-F	F	23101-X	X	23101W-F	F	23101W-X	X
23101-G	G	23101-Y	Y	23101W-G	G	23101W-Y	Y
23101-H	H	23101-Z	Z	23101W-H	H	23101W-Z	Z
23101-I	I	23101-0	Zero	23101W-I	I	23101W-0	Zero
23101-J	J	23101-1	1	23101W-J	J	23101W-1	1
23101-K	K	23101-2	2	23101W-K	K	23101W-2	2
23101-L	L	23101-3	3	23101W-L	L	23101W-3	3
23101-M	M	23101-4	4	23101W-M	M	23101W-4	4
23101-N	N	23101-5	5	23101W-N	N	23101W-5	5
23101-O	O	23101-6	6	23101W-O	O	23101W-6	6
23101-P	P	23101-7	7	23101W-P	P	23101W-7	7
23101-Q	Q	23101-8	8	23101W-Q	Q	23101W-8	8
23101-R	R	23101-9	9	23101W-R	R	23101W-9	9

### Letters and Numbers - 4"

4" (101mm) Black				4" (101mm) White			
Part No.	Letter	Part No.	Letter	Part No.	Letter	Part No.	Letter
23100-A	A	23100-S	S	23100W-A	A	23100W-S	S
23100-B	B	23100-T	T	23100W-B	B	23100W-T	T
23100-C	C	23100-U	U	23100W-C	C	23100W-U	U
23100-D	D	23100-V	V	23100W-D	D	23100W-V	V
23100-E	E	23100-W	W	23100W-E	E	23100W-W	W
23100-F	F	23100-X	X	23100W-F	F	23100W-X	X
23100-G	G	23100-Y	Y	23100W-G	G	23100W-Y	Y
23100-H	H	23100-Z	Z	23100W-H	H	23100W-Z	Z
23100-I	I	23100-0	Zero	23100W-I	I	23100W-0	Zero
23100-J	J	23100-1	1	23100W-J	J	23100W-1	1
23100-K	K	23100-2	2	23100W-K	K	23100W-2	2
23100-L	L	23100-3	3	23100W-L	L	23100W-3	3
23100-M	M	23100-4	4	23100W-M	M	23100W-4	4
23100-N	N	23100-5	5	23100W-N	N	23100W-5	5
23100-O	O	23100-6	6	23100W-O	O	23100W-6	6
23100-P	P	23100-7	7	23100W-P	P	23100W-7	7
23100-Q	Q	23100-8	8	23100W-Q	Q	23100W-8	8
23100-R	R	23100-9	9	23100W-R	R	23100W-9	9





**ABCDEFGHIJKLM  
NOPQRSTUVWXYZ  
0123456789**

**ABCDEFGHIJKLM  
NOPQRSTUVWXYZ  
0123456789**

- Self adhesive.

NOTE: Sold in pairs.

### Letters and Numbers - 6.5"

6.5" (165mm) Black			
Part No.	Letter	Part No.	Letter
23099-A	A	23099-S	S
23099-B	B	23099-T	T
23099-C	C	23099-U	U
23099-D	D	23099-V	V
23099-E	E	23099-W	W
23099-F	F	23099-X	X
23099-G	G	23099-Y	Y
23099-H	H	23099-Z	Z
23099-I	I	23099-0	Zero
23099-J	J	23099-1	1
23099-K	K	23099-2	2
23099-L	L	23099-3	3
23099-M	M	23099-4	4
23099-N	N	23099-5	5
23099-O	O	23099-6	6
23099-P	P	23099-7	7
23099-Q	Q	23099-8	8
23099-R	R	23099-9	9



6.5" (165mm) White			
Part No.	Letter	Part No.	Letter
23099W-A	A	23099W-S	S
23099W-B	B	23099W-T	T
23099W-C	C	23099W-U	U
23099W-D	D	23099W-V	V
23099W-E	E	23099W-W	W
23099W-F	F	23099W-X	X
23099W-G	G	23099W-Y	Y
23099W-H	H	23099W-Z	Z
23099W-I	I	23099W-0	Zero
23099W-J	J	23099W-1	1
23099W-K	K	23099W-2	2
23099W-L	L	23099W-3	3
23099W-M	M	23099W-4	4
23099W-N	N	23099W-5	5
23099W-O	O	23099W-6	6
23099W-P	P	23099W-7	7
23099W-Q	Q	23099W-8	8
23099W-R	R	23099W-9	9

### Letters and Numbers - 8"

8" (203mm) Black			
Part No.	Letter	Part No.	Letter
23102-A	A	23102-S	S
23102-B	B	23102-T	T
23102-C	C	23102-U	U
23102-D	D	23102-V	V
23102-E	E	23102-W	W
23102-F	F	23102-X	X
23102-G	G	23102-Y	Y
23102-H	H	23102-Z	Z
23102-I	I	23102-0	Zero
23102-J	J	23102-1	1
23102-K	K	23102-2	2
23102-L	L	23102-3	3
23102-M	M	23102-4	4
23102-N	N	23102-5	5
23102-O	O	23102-6	6
23102-P	P	23102-7	7
23102-Q	Q	23102-8	8
23102-R	R	23102-9	9

8" (203mm) White			
Part No.	Letter	Part No.	Letter
23102W-A	A	23102W-S	S
23102W-B	B	23102W-T	T
23102W-C	C	23102W-U	U
23102W-D	D	23102W-V	V
23102W-E	E	23102W-W	W
23102W-F	F	23102W-X	X
23102W-G	G	23102W-Y	Y
23102W-H	H	23102W-Z	Z
23102W-I	I	23102W-0	Zero
23102W-J	J	23102W-1	1
23102W-K	K	23102W-2	2
23102W-L	L	23102W-3	3
23102W-M	M	23102W-4	4
23102W-N	N	23102W-5	5
23102W-O	O	23102W-6	6
23102W-P	P	23102W-7	7
23102W-Q	Q	23102W-8	8
23102W-R	R	23102W-9	9

## International Code Flag Set

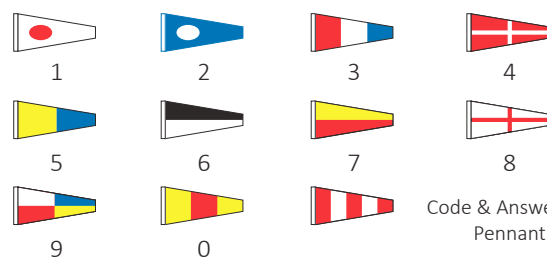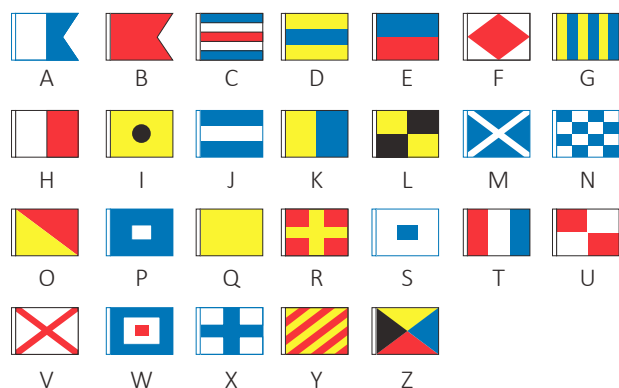

### Substitutes




Part No.		Description			
37154	International Code Flag Set				
International Code Flag Set Included			International Code Flag Set Included		
Code	Dimensions (mm)	International Code	Code	Dimensions (mm)	International Code
A	430 x 285	I have a diver down; keep well clear at slow speed.	W	450 x 300	I require medical assistance.
B	420 x 260	I am taking in or discharging or carrying dangerous goods.	X	440 x 295	Stop carrying out your intentions and watch for my signals.
C	440 x 305	Yes or affirmative.	Y	440 x 295	I am dragging my anchor.
D	440 x 335	Keep clear of me; I am manoeuvring with difficulty.	Z	440 x 305	I require a tug.
E	440 x 305	I am directing my course to starboard.	0	780 x 205	Numeral zero
F	440 x 300	I am disabled; communicate with me.	1	710 x 215	Numeral one
G	405 x 295	I require a pilot.	2	700 x 205	Numeral two
H	460 x 295	I have a pilot on board.	3	785 x 210	Numeral three
I	460 x 295	I am altering my course to port.	4	735 x 205	Numeral four
J	440 x 320	I am on fire and have dangerous cargo on board: keep well clear of me.	5	810 x 205	Numeral five
K	460 x 295	I wish to communicate with you.	6	635 x 195	Numeral six
L	475 x 290	You should stop your vessel immediately.	7	760 x 245	Numeral seven
M	455 x 295	My vessel is stopped and making no way through the water.	8	725 x 210	Numeral eight
N	440 x 340	No or negative.	9	730 x 195	Numeral nine
O	440 x 280	Man overboard.	PT	775 x 220	Message is understood. Also, numeric decimal point.
P	440 x 295	In Harbour (Blue Peter): All persons should report on board as the vessel is about to proceed to sea.	1st	480 x 285	Substitute for the first flag in this hoist.
Q	455 x 295	My vessel is 'healthy' and I request free pratique.	2nd	500 x 280	Substitute for the second flag in this hoist.
R	435 x 290	No signal.	3rd	580 x 315	Substitute for the third flag in this hoist.
S	455 x 305	My engines are going astern.			
T	415 x 295	Keep clear of me; I am engaged in pair trawling.			
U	445 x 235	You are running into danger.			
V	440 x 295	I require assistance.			



## Code Flags

Part No.	Description	Dimensions (mm)	Part No.	Description	Dimensions (mm)
37143	Code Flag 'A'	440 x 290	37159	Code Flag 'K'	600 x 450
37143A	Code Flag 'A'	760 x 600	37160	Code Flag 'L'	762 x 720
37143B	Code Flag 'A'	600 x 450	37146	Code Flag 'N'	400 x 300
37145	Code Flag 'B'	762 x 720	37146B	Code Flag 'N'	600 x 450
37144	Code Flag 'C'	440 x 290	37162	Code Flag 'P'	762 x 720
37144A	Code Flag 'C'	760 x 600	37164	Code Flag 'Q'	380 x 300
37144B	Code Flag 'C'	600 x 450	37163	Code Flag 'Q'	600 x 450
37153	Code Flag 'D'	762 x 720	37148	Code Flag 'R'	762 x 720
37168	Code Flag 'H'	760 x 600	37149	Code Flag 'Y'	762 x 720
37147	Code Flag 'I'	760 x 600	37165	Code Flag 'O'	760 x 600
37147B	Code Flag 'I'	600 x 450	37167	Code Flag '3'	760 x 600
37161	Code Flag 'J'	760 x 600			

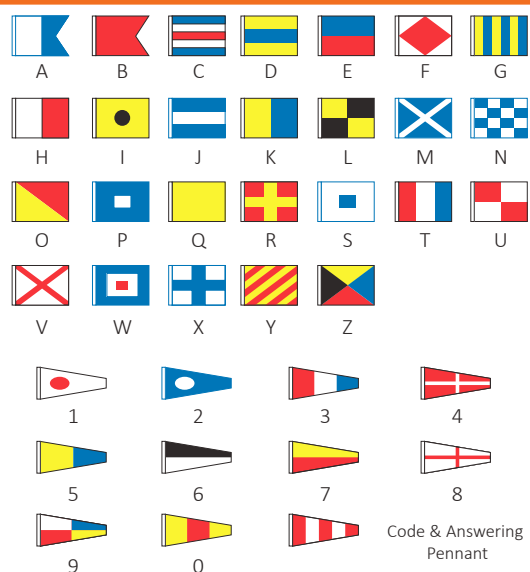

## Australian National & Red Ensign Flags

Part No.	Description	Dimensions (mm)
37156	Australian National Flag - 2ft	600 x 300
37151	Australian National Flag - 1 Yard	900 x 450
37150	Australian Red Ensign Flag - 1 Yard	900 x 450
37158	Australian Red Ensign Flag - 1.5 Yard	1350 x 675
37151A	Australian National Flag Fully Sewn - 2 Yard	1830 x 915



37150 / 37158



37151 / 37151A / 37156

## Flag Poles - Stainless Steel

Part No.	Description	Length (mm)	Suits Tube O.D. Ø (mm)	C (mm)
56752	Stainless Steel Flag Pole	750	25	470
56754	Stainless Steel Flag Pole	900	25	710
56755	Stainless Steel Flag Pole	1200	25	860

- 316G stainless steel.



## Flag Pole Socket - Stainless Steel

Part No.	Description	Suits Tube O.D. Ø (mm)
56750	Stainless Steel Flush Flag Pole Socket	25
56751	Stainless Steel 30° Flush Flag Pole Socket	25

- 316G stainless steel.



## Flag Pole Holder - Stainless Steel

Part No.	Description	Plastic Clamp Dia. Ø (mm)	Holder Length (mm)	Holder Dia. Ø (mm)	Weight (kg)
50572	S/S Flag Pole Holder	25	100	25	0.22

- Made by grade 304 stainless steel with plastic clamp.



## Flag Clips


Part No.	Description	Dimensions (mm)	Material	Weight (g)
35116	Flag Clip	42 x 28	Nylon	4.6
56004	Flag Clip Cast	57.5 x 40	S/S	83.8
RM41	Flag Clip	42 x 27	S/S	16
RM38	Flag Clip Mini	23 x 13	S/S	1.8





### Oil Safe® Mini Spout Pouring Lid



Part No.	Colour		Part No.	Colour	
180064	Black		180084	Orange	
180068	Blue		180088	Purple	
180072	Dark Green		180092	Red	
180076	Grey		180096	Tan	
180080	Light Green		180100	Yellow	

- Ideal for lubricating jobs such as constant level oilers and machine tools with small filler holes.
- 9/32" (7mm) outlet spout opening.
- Large hook handle for ease of carrying and to provide the ability to hang containers where needed.
- 140mm heat-resistant spout.
- Auto-shut off breather valve to avoid accidental spillage or contamination through breathers left open.
- Advanced thread design ensures secure fully sealing fit.
- Ultra durable construction which will not warp, leak, bend or break.
- Fits any 1.5, 2, 3, 5 or 10 litre Oil Safe® drums.
- Available in 10 different colours providing broad choice for easy and comprehensive fluid identification.

### Oil Safe® Stumpy Spout Pouring Lid












Part No.	Colour		Part No.	Colour	
180192	Black		180216	Orange	
180196	Blue		180220	Purple	
180200	Dark Green		180224	Red	
180204	Grey		180228	Tan	
180212	Light Green		180232	Yellow	

- Ideal for applications where a higher lubricant flow is required, such as for engine oils and gear oils.
- 1" outlet spout opening.
- Large hook handle for ease of carrying and to provide the ability to hang containers where needed.
- 150mm heat-resistant spout.
- Auto-shut off breather valve to avoid accidental spillage or contamination through breathers left open.
- Advanced thread design ensures secure fully sealing fit.
- Ultra durable construction which will not warp, leak, bend or break.
- Fits any 1.5, 2, 3, 5 or 10 litre Oil Safe® drums.
- Available in 10 different colours providing broad choice for easy and comprehensive fluid identification.

### Oil Safe® Stretch Spout Pouring Lid





Part No.	Colour		Part No.	Colour	
180152	Black		180174	Orange	
180156	Blue		180176	Purple	
180160	Dark Green		180180	Red	
180164	Grey		180184	Tan	
180172	Light Green		180188	Yellow	

- Design for use where precise pouring of lubricants is required, including hard to reach areas.
- Ideal for lower viscosity oils less than ISO 220.
- ½" (12.5mm) outlet spout opening.
- Large hook handle for ease of carrying and to provide the ability to hang containers where needed
- 225mm heat-resistant spout.
- Auto-shut off breather valve to avoid accidental spillage or contamination through breathers left open.
- Advanced thread design ensures secure fully sealing fit.
- Ultra durable construction which will not warp, leak, bend or break.
- Fits any 1.5, 2, 3, 5 or 10 litre Oil Safe® drums.
- Available in 10 different colours providing broad choice for easy and comprehensive fluid identification.




## Oil Safe® Storage Lid

Part No.	Colour	Part No.	Colour
 180112	Black	 180132	Orange
 180116	Blue	 180136	Purple
 180120	Dark Green	 180140	Red
 180124	Grey	 180144	Tan
 180128	Light Green	 180148	Yellow

- Ideal for on-site fluid storage and transporting applications.
- Safer and more convenient alternative to handling larger, bulkier drums.
- Advanced thread design ensures secure fully sealing fit.
- Ultra durable construction which will not warp, leak, bend or break.
- Fits any 1.5, 2, 3, 5 or 10 litre Oil Safe® drums.
- Available in 10 different colours providing broad choice for easy and comprehensive fluid identification.



## Oil Safe® Utility Lid

Part No.	Colour	Part No.	Colour
 180236	Black	 180248	Orange
 180240	Blue	 180252	Purple
 180242	Dark Green	 180256	Red
 180244	Grey	 180260	Tan
 180246	Light Green	 180264	Yellow

- Large outlet ensures fast and controlled pouring of lubricants.
- Advanced thread design ensures secure fully sealing fit.
- Ultra durable construction which will not warp, leak, bend or break.
- Use with a 1.5, 2, 3, 5 or 10 litre Oil Safe® drum to take care of hard to reach and time consuming pumping applications such as gearboxes and transmissions.
- Can be used with **180106** - oil transfer pump.
- Available in 10 different colours providing broad choice for easy and comprehensive fluid identification.



## Oil Safe® Accessories

## Oil Safe® Label Pocket &amp; Frame / Lockable Drum Ring

Part No.	Description
 180042	Oil Safe® Label Pocket & Frame / Lockable Drum Ring

- Label Pocket: 2" x 3.5" (50.4mm x 90mm) Double-sided pocket accommodates content labels and card stock and provides ample space for comprehensive identification information on containers and equipment.

*NOTE: The 2" x 3.5" size pocket can be used in conjunction with Label Leash.*

- Label Pocket Frame: Industrial-grade frame protects and colour codes label pockets — connect to equipment via LABEL SAFE™ magnets or clamps or to OIL SAFE® containers via LABEL SAFE™ drum rings.
- Colours: Yellow, Blue, Red and Mid Green.

*NOTE: The 2" x 3.5" Label Pockets match perfectly with this Label Pocket Frame. Suitable for indoor or outdoor use.*

- Lockable Drum Ring: Attach industrial-grade drum ring around neck of OIL SAFE® containers. Use with multiple label pockets and a colour-coded frame for container and fluid identification.



Label Pocket



Label Pocket Frame



Lockable Drum Ring



## Oil Safe® Mini Spout Valve Kit



Part No.	Description	
<b>180102</b>	Oil Safe® Mini Spout Valve Kit	

- Replace the black spout components on an Oil Safe Mini Spout lid.
- Twist top spouts on Oil Safe Lids provide for secure sealing of the containers and make it easy to get the lid into position for pouring without accidental spills.
- Kit contains: Mini Spout Shroud and Mini Spout Valve Inner with two Nitrile O-rings.

## Oil Transfer Pump - 20 Litre



Part No.	Description	
<b>180106</b>	Oil Transfer Pump - 20 Litre	

- The only manual transfer pump of its kind that is supplied with a removable discharge hose for easy cleaning and drainage.
- Perfect for quickly and easily accessing hard to reach and time consuming top up points such as gearboxes and transmission applications.
- Use with Oil Safe® utility lid, fits 3 litre, 5 litre and 10 litre Oil Safe® Drums.
- Fits most standard 20L drums.
- 170cm hose and spout.

## Oil Safe® Pump Reducer Nozzle



Part No.	Description	
<b>180108</b>	Oil Safe® Pump Reducer Nozzle	

- Pump reducer nozzle reduces the fitting on the pump hose from 9mm to 6mm / ¼" OD to ¼" OD allowing you to fill small openings.
- Suits both Oil Safe Standard and Premium Pump.

## Oil Safe® Stretch Extension Hose



Part No.	Description	Length (mm)	
<b>180168</b>	Oil Safe® Stretch Extension Hose	310	

- Ideal for awkward or hard to reach areas.
- The hose can be pulled from the fitting so that it can be cut to suit the application.
- Easily attaches to Oil Safe® 'Stretch Spout Pouring Lid'.
- Can you be used instead of a funnel.

## Oil Safe® Stumpy Extension Hose



Part No.	Description	Length (mm)	
<b>180208</b>	Oil Safe® Stumpy Extension Hose	260	

- Ideal for awkward or hard to reach areas.
- The hose can be pulled from the fitting so that it can be cut to suit the application.
- Easily attaches to Oil Safe® 'Stumpy Spout Pouring Lid'.
- Can you be used instead of a funnel.

## Oil Safe® Stumpy Spout Valve Kit




Part No.	Description	
<b>180234</b>	Oil Safe® Stumpy Spout Valve Kit	

- Replace the black spout components on an Oil Safe Stumpy Spout Lid.
- Twist top spouts provide for secure sealing of the containers and make it easy to get the lid into position for pouring without accidental spills.
- Kit contains: Stumpy Spout Shroud and Stumpy Spout Valve Inner with two Nitrile O-rings.



## Oil Safe® Drum - 1.5 Litre

Part No.	Width (mm)	Height (mm)	Outlet Size (mm)	Weight (g)	Capacity (Ltr)
 180048	158	178	120	318	1.5

- Ideal for small top-up work such as small reservoirs and oil filler bottles, particularly when mated with the Mini Spout Lid.
- Fully interchangeable with any Oil Safe lid, these drums have an extra wide neck opening for rapid pouring and easy cleaning.
- Measurements on drum start at 0.5 quart/litre and continue to 1.5 quarts/litres in 0.25 increments.

*NOTE: The 1.5 litre drum cannot be used with Oil Safe Pump. Not suitable for use with fuels or solvents.*



## Oil Safe® Drum - 2 Litre


Part No.	Width (mm)	Height (mm)	Outlet Size (mm)	Weight (g)	Capacity (Ltr)
 180052	160	220	120	325	2

- Ideal for top-up work on small to mid-sized sumps.
- Fully interchangeable with Oil Safe lids these drums have an extra wide neck opening for rapid pouring and easy cleaning.
- Measurements on drum start at 0.5 quart/litre and continue to 2 quarts/litres in 0.25 increments.

*NOTE: The 2 litre drum cannot be used with Oil Safe Pump. Not suitable for use with fuels or solvents.*



## Oil Safe® Drum - 3 Litre

Part No.	Width (mm)	Height (mm)	Outlet Size (mm)	Weight (g)	Capacity (Ltr)
 180056	160	269	120	400	3

- Ideal for servicing small to mid-range equipment filler applications.
- Fully interchangeable with Oil Safe lids these drums have an extra wide neck opening for rapid pouring and easy cleaning.
- Measurements on drum start at 0.5 quart/litre and continue to 3 quarts/litres in 0.25 increments.

*NOTE: Not suitable for use with fuels or solvents.*



## Oil Safe® Drum - 5 Litre


Part No.	Width (mm)	Height (mm)	Outlet Size (mm)	Weight (g)	Capacity (Ltr)
 180060	196	271	120	440	5

- Ideal for a host of standard applications from engines and pumps to turbines and gearboxes.
- Fully interchangeable with Oil Safe lids these drums have an extra wide neck opening for rapid pouring and easy cleaning.
- Measurements on drum start at 0.5 quart/litre and continue to 5 quarts/litres in 0.5 increments.

*NOTE: Not suitable for use with fuels or solvents.*



## Oil Safe® Drum - 10 Litre

Part No.	Width (mm)	Height (mm)	Outlet Size (mm)	Weight (g)	Capacity (Ltr)
 180044	252	348	120	860	10

- Ideal size for large sump fill applications while still maintaining mobility and ease of use without all the heavy lifting and potential back injuries from lifting larger impractical drums.
- Fully interchangeable with Oil Safe lids these drums have an extra wide neck opening for rapid pouring and easy cleaning.
- Measurements on drum start at 0.5 quart/litre and continue to 10 quarts/litres in 0.5 increments.

*NOTE: Not suitable for use with fuels or solvents.*

