




LED BLADE READING LIGHT

INSTALLATION INSTRUCTIONS

PART NO.: 709901

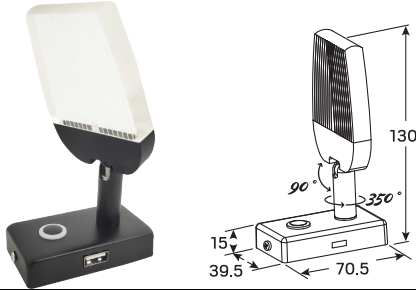

FEATURES

- Adjustable lighting direction 350° swivel and 90° vertical tilt.
- Touch switch - dimmable.
- Dimmer memory - last dimmable setting remains.
- Night Light (blue LED night light) - used as auxiliary or decorative lighting and as a switch backlight.
- USB charge port 5V / 2A.
- Surface mount - mounting screws included.

SPECIFICATIONS


Volts:	10-30V	Dimensions (mm):	Base L 70.5 x W 39.5 x H 15 Height 130
Watts:	3W	Charger Socket:	Output 5V / 2A
Light Output:	650LM	Wire Length:	125mm Tinned
LED Chip Type:	6 x Bridgelux LEDs	Material:	Matte Black / Aluminium / Iron (USB Port)
LED Colour:	Warm White (Reading Mode)		* USB Port - Keep dry.
IP Rating:	IP44	Lighting Direction:	350° Swivel / 90° Vertical Tilt
Dimming:	Dimmable (Touch Switch)	Certificates:	CE, Rohs and ISO9001:2015

TOUCH SWITCH FUNCTION:

NIGHT MODE (ON) / READING MODE (DIM) / OFF

1. First Touch: activates blue night light.
2. Second Touch: activates the reading light, night light remains on.
3. Hold to dim the reading light (dimming setting is remembered).
4. Third touch - switches both reading and night light off.


1:1 MOUNTING TEMPLATE

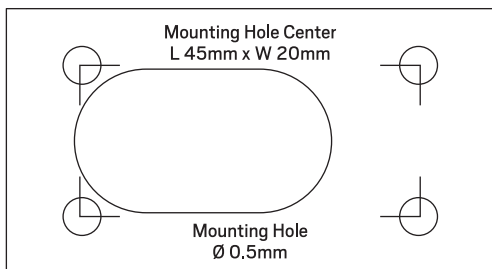


Using 1:1 mounting template or bracket to mark the location on a surface where you want to mount the light.

INSTALLATION


1. Detach bracket from light base with screwdriver.



2. Mount the bracket to the surface with screws. Connect the wire.

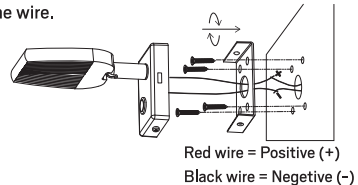

3. Screw the light base on the bracket with a screwdriver.



4. Turn on the electricity, ready to work.

